


WESTERN DIGITAL CORPORATION
XTAT-FASST

Q1/94

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: None

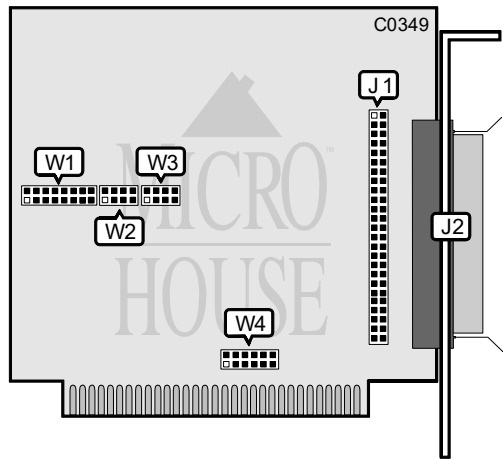

CONNECTIONS	
Function	Location
50-pin SCSI Interface connector - internal	J1
50-pin SCSI Interface connector - external	J2

I/O OPTIONS - W1			
DMA	Jumper 1	Jumper 2	Jumper 3
i Single Byte Programmed I/O	open	open	open
DMA Cannel 1	closed	open	open
Demand Drive I/O	open	closed	open
DMA Channel 3	closed	closed	closed

INTERRUPT REQUEST				
IRQ	W1/jumper 4	W1/jumper 5	W1/jumper 6	W4
IRQ2	open	closed	open	Jumper 1 - closed
IRQ3	closed	closed	open	Jumper 2 - closed
IRQ4	open	open	closed	Jumper 3 - closed
IRQ5	closed	open	closed	Jumper 4 - closed

IRQ6	open	closed	closed	Jumper 5 - closed
IRQ7	closed	closed	closed	Jumper 6 - closed

Continued on next page . . .

WESTERN DIGITAL CORPORATION

XTAT-FASST

... continued from previous page

I/O PORT ADDRESS - W2				
Address	Jumper 1	Jumper 2	Jumper3	Jumper 4
200h	closed	closed	closed	closed
220h	open	closed	closed	closed
240h	closed	open	closed	closed
260h	open	open	closed	closed
280h	closed	closed	open	closed
2A0h	open	closed	open	closed
2C0h	closed	open	open	closed
2E0h	open	open	open	closed
300h	closed	closed	closed	open
320h	open	closed	closed	open
340h	closed	open	closed	open
360h	open	open	closed	open
380h	closed	closed	open	open
3A0h	open	closed	open	open
3C0h	closed	open	open	open
3E0h	open	open	open	open

BIOS ADDRESS - W3				
Address	Jumper 1	Jumper 2	Jumper 3	Jumper 4
C000h	closed	closed	closed	closed
C400h	open	closed	closed	closed
C800h	closed	open	closed	closed
CC00h	open	open	closed	closed
D000h	closed	closed	open	closed
D400h	open	closed	open	closed
D800h	closed	open	open	closed
DC00h	open	open	open	closed
E000h	closed	closed	closed	open
E400h	open	closed	closed	open
E800h	closed	open	closed	open
EC00h	open	open	closed	open
F000h	closed	closed	open	open
F400h	open	closed	open	open
F800h	closed	open	open	open
FC00h	open	open	open	open