


QDI COMPUTER, INC.  
QD5500A

Q1/95

Data bus: 32-bit, VL-bus  
Size: Three/quarter-length, full-height card  
Hard drive supported: Two IDE (AT) interface drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB or 1.44MB drives

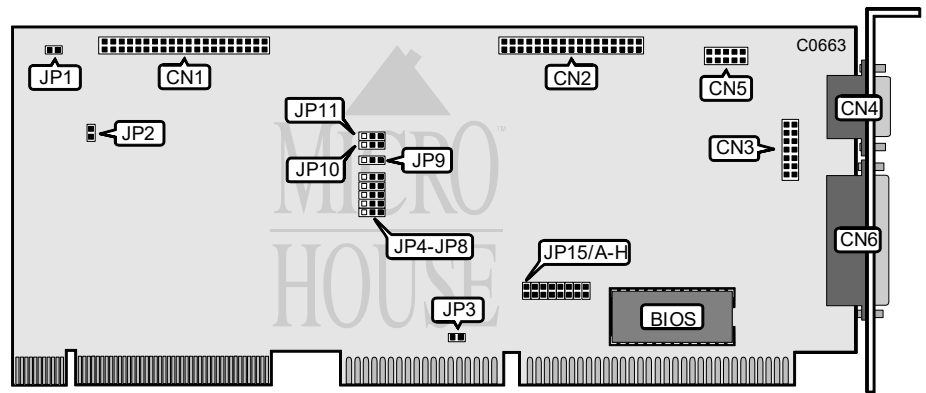

CONNECTIONS	
Function	Location
40-pin IDE (AT) interface connector - port 1	CN1
34-pin control cabled connector - floppy drive	CN2
Game port	CN3
9-pin serial port 1 - external	CN4
10-pin serial port 2 - internal	CN5
25-pin parallel port	CN6
2-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i VL-IDE enabled	JP2	Open
VL-IDE disabled	JP2	Closed
i Factory configured - do not alter	JP3	Closed
i Game port enabled	JP5	Pins 1 & 2 closed
Game port disabled	JP5	Pins 2 & 3 closed
i Floppy drive enabled	JP9	Pins 1 & 2 closed
Floppy drive disabled	JP9	Pins 2 & 3 closed

Continued on next page . . .

QDI COMPUTER, INC.  
QD5500A

... continued from previous page

PARALLEL PORT CONFIGURATION			
LPT/Address		JP4	JP8
LF 1/378h		Pins : & 2 closed	Pins : & 2 closed
LF 2/278h		Pins : & 3 closed	Pins : & 2 closed
LF 3/378h		N/A	Pins : & 3 closed

SERIAL PORT 1 CONFIGURATION			
COM		JP10	JP11
COM1		Pins : & 2 closed	Pins : & 2 closed
COM3		Pins : & 3 closed	Pins : & 2 closed
Disabled		N/A	Pins : & 3 closed

SERIAL PORT 2 CONFIGURATION					
COM		JP6		JP7	
1	COM2	Pins 1 & 2	closed	Pins 1 & 2	closed
2	COM4	Pins 1 & 3	closed	Pins 1 & 3	closed
3	Disabled	N/A		Pins 1 & 3	closed

[illegible]