


PROMISE TECHNOLOGY, INC.

DC-4030VL (REV. 2)

Q2/95

Data bus: VESA local-bus
 Size: Three/quarter-length, full-height card
 Hard drive supported: Four IDE (AT) Interface drives
 Floppy drives supported: Four 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

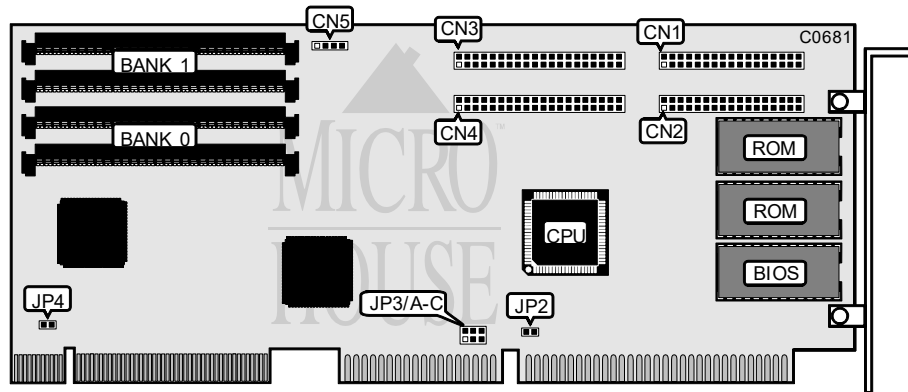

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive BUS-0	CN1
34-pin control cable connector - floppy drive BUS-1	CN2
40-pin IDE (AT) Interface connector IDE-0	CN3
40-pin IDE (AT) Interface connector IDE-1	CN4
4-pin connector - drive active LED	CN5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
if Floppy drive enabled	JP2	closed
Floppy drive disabled	JP2	open
if VESA bus speed normal	JP4	closed
VESA bus speed 50Mhz	JP4	open

INTERRUPT SELECT			
IRQ	JP3/A	JP3/B	JP3/C
IRQ12	closed	open	open
IRQ14	open	closed	open
IRQ15	open	open	closed

Continued on next page . . .

PROMISE TECHNOLOGY, INC.
DC-4030VL (REV. 2)

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256KB x 9	NONE
1MB	(2) 256KB x 9	(2) 256KB x 9
1.5MB	(2) 256KB x 9	(2) 1MB x 9
2MB	(2) 1MB x 9	NONE
2.5MB	(2) 1MB x 9	(2) 256KB x 9
4MB	(2) 1MB x 9	(2) 1MB x 9
8MB	(2) 4MB x 9	NONE
8.5MB	(2) 256KB x 9	(2) 4MB x 9
8.5MB	(2) 4MB x 9	(2) 256KB x 9
10MB	(2) 1MB x 9	(2) 4MB x 9
10MB	(2) 4MB x 9	(2) 1MB x 9
16MB	(2) 4MB x 9	(2) 4MB x 9