


INFOMATIC POWER SYSTEMS CORPORATION

VISTA-5033

Q1/94

Data bus: 32-bit, VI bus
 Size: Three/quarter-length, full-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

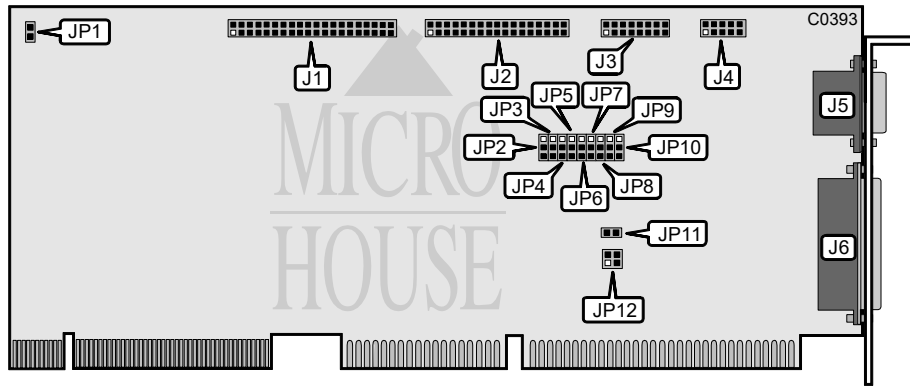

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	J1
34-pin control cable connector - floppy drive	J2
15-pin game port - internal	J3
10-pin serial port (COM2/3/4) - internal	J4
10-pin serial port (COM1/3/4) - external	J5
25-pin parallel port (LPT1/2/3) - external	J6
2-pin connector - Drive active LED	JP1


USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Hard drive enabled	JP2	pins 1 & 2 closed
Hard drive disabled	JP2	Pins 2 & 3 closed
i Floppy drive enabled	JP3	pins 1 & 2 closed
Floppy drive disabled	JP3	Pins 2 & 3 closed
i Game Port (J3) enabled	JP11	closed
Game Port (J3) disabled	JP11	open

Continued on next page . . .

INFOMATIC POWER SYSTEMS CORPORATION

VISTA-5033

... continued from previous page

SERIAL PORT CONFIGURATION				
Port 1 (J5)	IRQ	JP4	JP5	JP12
				
COM1	IRQ4	Pins 1 & 2 closed	Pins 1 & 2 closed	pins 1 & 2 closed
COM2	IRQ3	Pins 1 & 2 closed	Pins 2 & 3 closed	pins 2 & 4 closed
COM3	IRQ4	Pins 2 & 3 closed	Pins 1 & 2 closed	pins 1 & 2 closed
Disabled	N/A	Pins 2 & 3 closed	Pins 2 & 3 closed	N/A

SERIAL PORT CONFIGURATION				
Port 2 (J4)	IRQ	JP6	JP7	JP12
COM2	IRQ3	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 3 & 4 closed
COM1	IRQ4	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 3 closed
COM4	IRQ3	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 3 & 4 closed
Disabled	N/A	Pins 2 & 3 closed	Pins 2 & 3 closed	N/A

PARALLEL PORT SETTINGS				
LPT	IRQ	JP8	JP9	JP10
1	IRQ7	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
2	IRQ5	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
3	N/A	Pins 1 & 2 closed	Pins 2 & 3 closed	N/A
Disabled	N/A	Pins 2 & 3 closed	Pins 2 & 3 closed	N/A