


Q LOGIC CORPORATION
FAST!SCSI VESA LOCAL

Q2/95

Data bus: 16-bit, ISA
Size: Three quarter-length, full-height card
Hard drive supported: Up to fifteen SCSI devices
Floppy drives supported: N/A

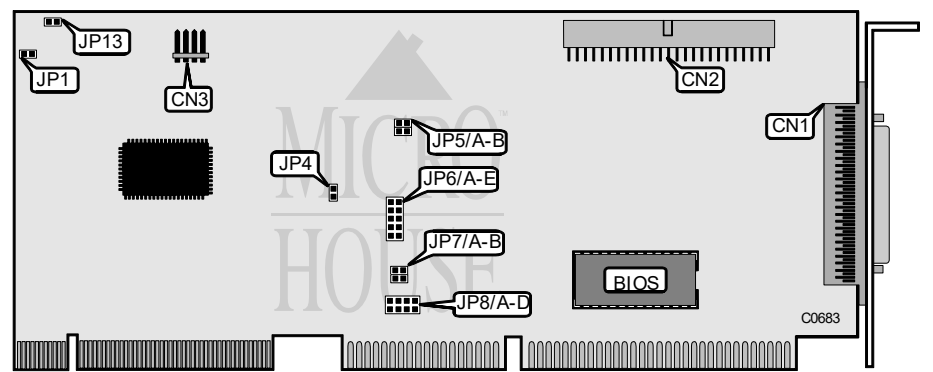

CONNECTIONS		
Function		Location
50-pin SCSI connector - external		CN1
50-pin SCSI connector - internal		CN2
4-pin connector - Drive active LED		CN3

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
i	I/O Address - 330h	JP1	pins 1 & 2 closed
	I/O Address - 230h	JP1	pins 2 & 3 closed
i	SCSI termination - enabled	JP4	open
	SCSI termination - disabled	JP4	closed
i	VESA bus speed - 50Mhz disabled	JP13	open
	VESA bus speed - 50Mhz enabled	JP13	closed
i	Data transfer mode asynchronous	JP6/A	open
	Data transfer mode synchronous	JP6/A	closed
i	SCSI ID7	JP6/B	open
	SCSI ID6	JP6/B	closed
i	Parity - enabled	JP6/C	open
	Parity - disabled	JP6/C	closed

Continued on next page . . .

Q LOGIC CORPORATION

FAST!SCSI VESA LOCAL

... continued from previous page

BIOS SELECT		
Setting	JP7/A	JP7/B
Enabled	closed	open
Disabled	open	open

BIOS ADDRESS SELECT		
Address	JP5/A	JP5/B
C8000	open	open
CC000	open	closed
D8000	closed	open
DC000	closed	closed

INTERRUPT SELECT						
IRQ	JP8/A	JP8/B	JP8/C	JP8/D	JP6/D	JP6/E
IRQ11	open	closed	open	open	open	open
IRQ10	closed	open	open	open	closed	open
IRQ12	open	open	closed	open	closed	closed
IRQ15	open	open	open	closed	open	closed