


EVEREX SYSTEMS, INC.

EV-392

Q1/95

Data bus: 8-bit, ISA
 Size: Three/quarter-length, full-height card
 Hard drive supported: Two RLL ST412 drives
 Floppy drives supported: None

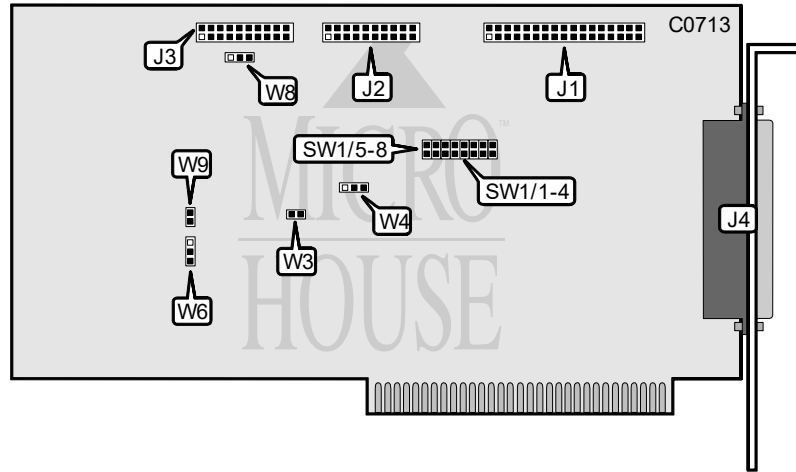

CONNECTIONS	
Function	Location
34-pin control cable connector - hard drive	J1
20-pin data cable connector - drive 1	J2
20-pin data cable connector - drive 2	J3
37-pin external drive connector	J4

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
i Factory configured - do not alter	SW1/jumper 5	Open	
i Factory configured - do not alter	SW1/jumper 6	Open	
i Factory configured - do not alter	SW1/jumper 7	Open	
i Factory configured - do not alter	SW1/jumper 8	Open	
i Factory configured - do not alter	W3	N/A	
i Factory configured - do not alter	W4	N/A	
i Factory configured - do not alter	W6	N/A	
i Factory configured - do not alter	W9	N/A	

Continued on next page . . .

EVEREX SYSTEMS, INC.
EV-392

. . . continued from previous page

DRIVE FORMATS - SW1						
Capacity	Heads	Cylinders	Drive 1		Drive 2	
			Jumper 3	Jumper 4	Jumper 1	Jumper 2
65MB	5	981	Closed	Closed	Closed	Closed
92MB	7	987	Open	Closed	Open	Closed
31MB	4	612	Closed	Open	Closed	Open
32MB	4	615	Open	Open	Open	Open