


RELIALOGIC CORPORATION PRIVATE, LTD.
CA9312
strangest1

Q1/95

Data bus: 16-bit, ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

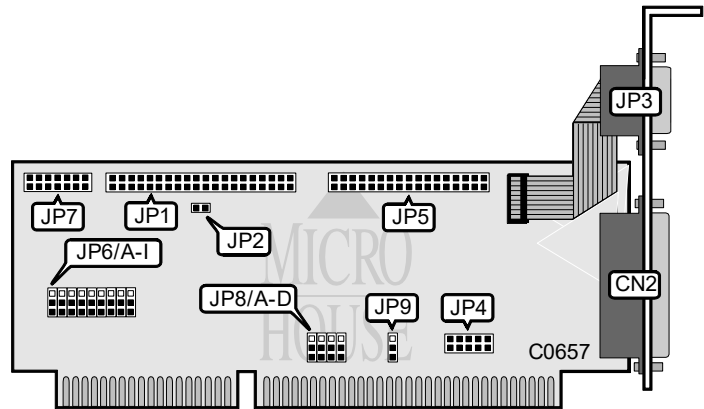

CONNECTIONS		
Function		Location
25-pin parallel port		CN1
40-pin IDE (AT) Interface connector		JP1
2-pin connector - drive active LED		JP2
9-pin serial port 1 - external		JP3
10-pin serial port 2 - internal		JP4
34-pin control cable connector - floppy drive		JP5

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
i	Game port enabled	JP6/Jumper G	Pins 1 & 2 closed
	Game port disabled		Pins 2 & 3 closed
i	Floppy drive enabled	JP6/Jumper H	Pins 1 & 2 closed
	Floppy drive disabled		Pins 2 & 3 closed
i	HDD enabled	JP6/Jumper I	Pins 1 & 2 closed
	HDD disabled		Pins 2 & 3 closed
i	IRQ7 selected for parallel port	JP9	Pins 1 & 2 closed
	IRQ5 selected for parallel port		Pins 2 & 3 closed

Continued on next page . . .

RELIALOGIC CORPORATION PRIVATE, LTD.
CA9312

... continued from previous page

PARALLEL PORT CONFIGURATION - JP6				
LPT/Address		Jumper A		Jumper B
LF 1/378h		Pins 1 & 2 closed		Pins 1 & 2 closed
LF 2/278h		Pins 1 & 3 closed		Pins 1 & 2 closed
Disabled		N/A		Pins 1 & 3 closed

SERIAL PORT 1 CONFIGURATION - JP6				
COM		Jumper C		Jumper D
1 COM1		Pins 1 & 2 closed		Pins 1 & 2 closed
COM3		Pins 1 & 3 closed		Pins 1 & 2 closed
Disabled		N/A		Pins 1 & 3 closed

SERIAL PORT 2 CONFIGURATION - JP6				
COM		Jumper E		Jumper F
1 COM2		Pins 1 & 2 closed		Pins 1 & 2 closed
COM4		Pins 1 & 3 closed		Pins 1 & 2 closed
Disabled		N/A		Pins 1 & 3 closed

SERIAL PORT 1 INTERRUPT SELECT - JP8				
IRQ	Jumper A	Jumper B	Jumper C	Jumper D
IRQ4	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open
IRQ2	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed
IRQ3	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open
IRQ5	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open
Disabled	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open

SERIAL PORT 2 INTERRUPT SELECT - JP8				
IRQ	Jumper A	Jumper B	Jumper C	Jumper D
1 IRQ3	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open
IRQ2	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed
IRQ4	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open
IRQ5	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open
Disabled	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open