


UNIDENTIFIED
CI-171
strangest3

Q1/95

Data bus: 16-bit, ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

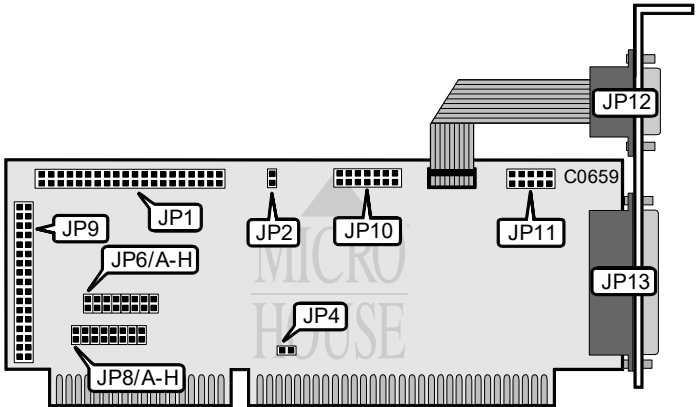

CONNECTIONS		
Function		Location
40-pin IDE (AT) Interface connector		JP1
2-pin connector - drive active LED		JP2
34-pin control cable connector - floppy drive		JP9
Game port		JP10
10-pin serial port 2 - internal		JP11
9-pin serial port 1 - external		JP12
25-pin parallel port		JP13

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
i Parallel port is output only		JP4	Closed
	Parallel port is input only	JP4	Open
i Floppy drive enabled		JP6/jumper G	Closed
	Floppy drive disabled	JP6/jumper G	Open
i HDD enabled		JP6/jumper H	Closed
	HDD enabled	JP6/jumper H	Open

Continued on next page . . .

UNIDENTIFIED
CI-171

... continued from previous page

SERIAL PORT 1 CONFIGURATION - JP6		
COM/Address	Jumper A	Jumper B
í C)M1/3F8h	losed	Open
C)M3/3E8h	losed	losed
C)M4/2E8h	Open	losed
)isabled	Open	Open

SERIAL PORT 2 CONFIGURATION - JP6		
COM/Address	Jumper C	Jumper D
í C)M2/2F8h	losed	Open
C)M3/3E8h	losed	losed
C)M4/2E8h	Open	losed
)isabled	Open	Open

SERIAL PORT 1 INTERRUPT SELECT - JP8			
IRQ	Jumper A	Jumper B	Jumper C
í IRQ4	Closed	Open	Open
IRQ3	Open	Closed	Open
IRQ5	Open	Open	Closed
Disabled	Open	Open	Open

SERIAL PORT 2 INTERRUPT SELECT - JP8			
IRQ	Jumper D	Jumper E	Jumper F
í IRQ3	Closed	Open	Open
IRQ4	Open	Closed	Open
IRQ5	Open	Open	Closed
Disabled	Open	Open	Open

PARALLEL PORT CONFIGURATION - JP6		
LPT/Address	Jumper E	Jumper F
í L)T2/378h	Open	losed
L)T1/3BCh	losed	losed
L)T3/278h	losed	Open
)isabled	Open	Open

PARALLEL PORT INTERRUPT SELECT - JP8		
IRQ	Jumper G	Jumper H
í IRQ7	losed	Open
IRQ5	Open	losed
)isabled	Open	Open