


BUSLOGIC, INC.
BT-956CD

Data bus: 32-bit PCI
Size: Half-length, full-height card
Hard drive supported: Up to fifteen SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

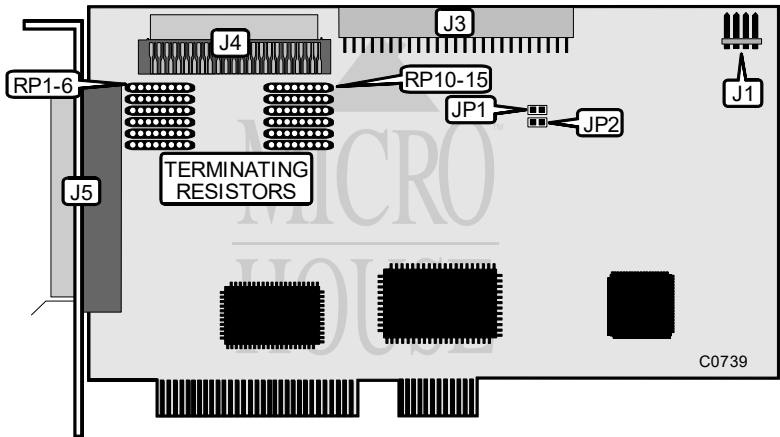

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	J1
50-pin connector-SCSI interface (internal)	J3
68-pin connector-SCSI interface (internal)	J4
68-pin connector-SCSI interface (external)	J5

BASE MEMORY ADDRESS SELECTION		
Address	JP1	JP2
i System BIOS	open	open
C800h	closed	open
D800h	open	closed
DC00h	closed	closed

TERMINATION POWER CONFIGURATION	
Setting	Terminators Installed
Data bits 0-7 terminated	RP1, RP2, RP3, RP4, RP10, RP11, RP12, RP13
Data bits 8-15 terminated	RP5, RP6, RP14, RP15
All signals terminated	All installed