


UNIDENTIFIED IODE-3292PUV

Q2/95

Data bus: 32-bit, VL-bus
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

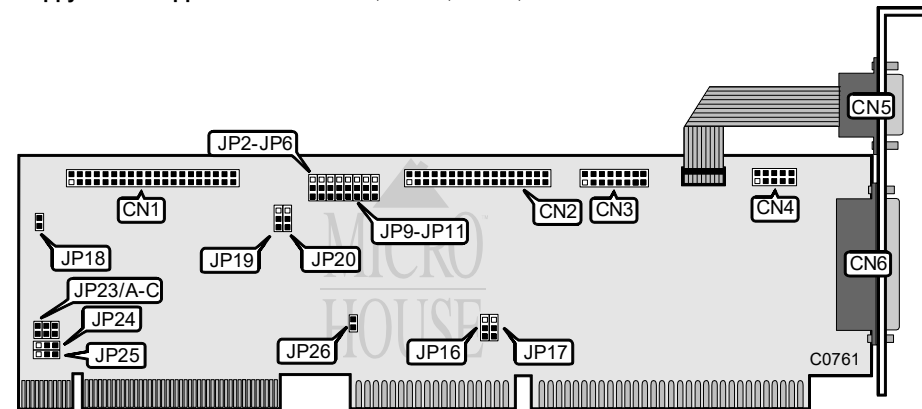

CONNECTIONS		
Function	Location	
40-pin IDE(AT) Interface connector	CN1	
34-pin control cable connector - floppy drive	CN2	
Game port	CN3	
10-pin serial port 2 - internal	CN4	
9-pin serial port 1 - external	CN5	
25-pin parallel port	CN6	
2-pin connector - drive active LED	JP18	

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Floppy drive enabled	JP2	pins 1 & 2 closed
Floppy drive disabled	JP2	pins 2 & 3 closed
i Game Port enabled	JP6	pins 1 & 2 closed
Game Port disabled	JP6	pins 2 & 3 closed
i Serial port 1 interrupt = IRQ4	JP16	pins 1 & 2 closed
Serial port 1 interrupt = IRQ3	JP16	pins 2 & 3 closed
i Serial Port 2 interrupt = IRQ3	JP17	pins 1 & 2 closed
Serial Port 2 interrupt = IRQ4	JP17	pins 2 & 3 closed
Local bus device synchronous mode selected	JP23/A-C	jumper A closed

Continued on next page . . .

UNIDENTIFIED

IODE-3292PUV

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Local bus device asynchronous mode 1 selected	JP23/A-C	jumper B closed
Local bus device asynchronous mode 2 selected	JP23/A-C	jumper C closed
ADS synchronous mode selected	JP24	pins 1 & 2 closed
ADS asynchronous mode selected	JP24	pins 2 & 3 closed
Local bus clock synchronous mode selected	JP25	pins 1 & 2 closed
Local bus clock asynchronous mode selected	JP25	pins 2 & 3 closed
i Factory configured - do not alter	JP26	closed

PARALLEL PORT CONFIGURATION		
LPT/Address	JP3	JP9
i LPT1/378h	pins 1 & 2 closed	pins 1 & 2 closed
LPT2/278h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 1 CONFIGURATION		
COM/Address	JP4	JP10
i COM1/3F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM3/3E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 2 CONFIGURATION		
COM/Address	JP5	JP11
i COM2/2F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM4/2E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

HARD DRIVE SPEED		
Setting	JP19	JP20
i Speed 0	pins 1 & 2 closed	pins 1 & 2 closed
Speed 1	pins 2 & 3 closed	pins 1 & 2 closed
Speed 2	pins 2 & 3 closed	pins 2 & 3 closed