


UNIDENTIFIED UMC VESA IDE

Q2/95

Data bus: 32-bit, VL-bus
 Size: Three/quarter-length, half-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

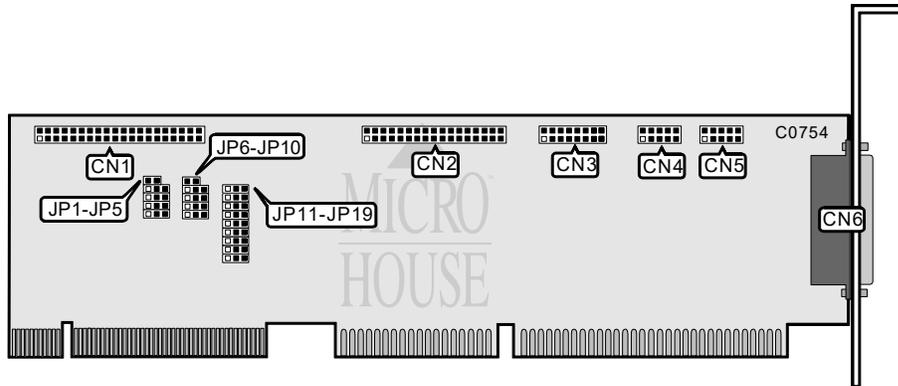

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
2-pin connector - drive active LED	JP6
34-pin control cable connector - floppy drive	CN2
15-pin game port	CN3
10-pin serial port 1	CN4
10-pin serial port 2	CN5
25-pin parallel port	CN6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Factory configured - do not alter	JP1	n/a
i Factory configured - do not alter	JP2	pins 2 & 3 closed
i IDE port enabled	JP7	pins 1 & 2 closed
IDE port disabled	JP7	pins 2 & 3 closed
i Factory configured - do not alter	JP12	pins 2 & 3 closed
i Floppy drive enabled	JP16	pins 1 & 2 closed
Floppy drive disabled	JP16	pins 2 & 3 closed
i Game port enabled	JP19	pins 1 & 2 closed
Game port disabled	JP19	pins 2 & 3 closed

Continued on next page . . .

UNIDENTIFIED UMC VESA IDE

... continued from previous page

IDE ACTIVE TIME			
Setting	JP3	JP4	JP5
í 10	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
9	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
8	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
7	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
6	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
5	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
4	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
3	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed

IDE RECOVERY TIME			
Setting	JP8	JP9	JP10
í 19	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
17	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
15	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
13	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
11	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
9	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
7	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
5	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed

PARALLEL PORT CONFIGURATION		
LPT/Address	JP11	JP17
í LPT2/378h	pins 1 & 2 closed	pins 1 & 2 closed
LPT3/278h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 1 CONFIGURATION		
COM/Address	JP13	JP14
í COM1/3F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM3/3E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 2 CONFIGURATION		
COM/Address	JP15	JP18
í COM2/2F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM4/2E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a