


UNIDENTIFIED IODE-3292PUV-C

Q2/95

Data bus: 32-bit, VL-bus
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

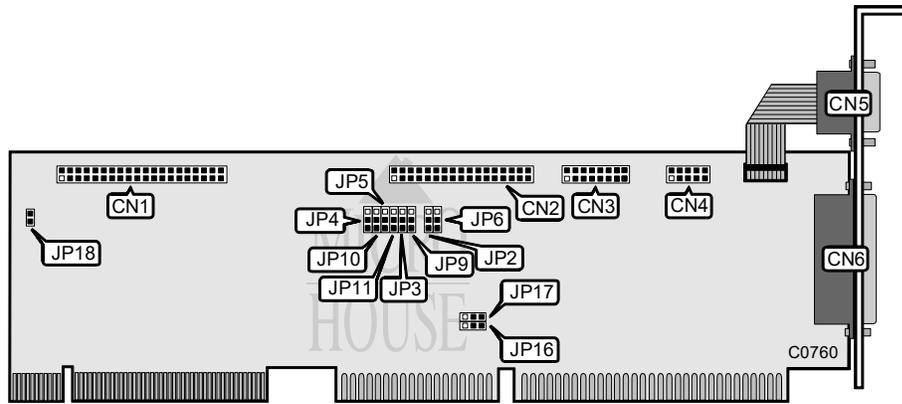

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
Game port	CN3
10-pin serial port 2 - internal	CN4
9-pin serial port 1 - external	CN5
25-pin parallel port	CN6
2-pin connector - drive active LED	JP18

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive enabled	JP2	pins 1 & 2 closed
Floppy drive disabled	JP2	pins 2 & 3 closed
f Game Port enabled	JP6	pins 1 & 2 closed
Game Port disabled	JP6	pins 2 & 3 closed
f Serial port 1 interrupt = IRQ4	JP16	pins 1 & 2 closed
Serial port 1 interrupt = IRQ3	JP16	pins 2 & 3 closed
f Serial Port 2 interrupt = IRQ3	JP17	pins 1 & 2 closed
Serial Port 2 interrupt = IRQ4	JP17	pins 2 & 3 closed

Continued on next page . . .

UNIDENTIFIED

IODE-3292PUV-C

... continued from previous page

PARALLEL PORT CONFIGURATION		
LPT/Address	JP3	JP9
í LPT1/378h	pins 1 & 2 closed	pins 1 & 2 closed
LPT2/278h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 1 CONFIGURATION		
COM/Address	JP4	JP10
í COM1/3F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM3/3E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 2 CONFIGURATION		
COM/Address	JP5	JP11
í COM2/2F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM4/2E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a