
Q2/95

## ADVANCED LOGIC RESEARCH, INC. R66

Data bus: 16-bit ISA

Three-quarter length, full-height card Two RLL ST412/506 drives Size:

Hard drive supported: Floppy drives supported:

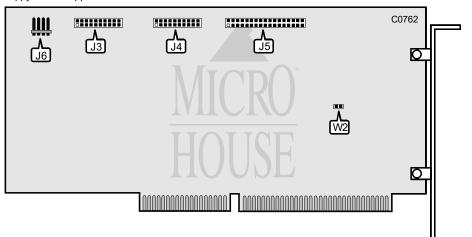

CONNECTIONS		
Function	Location	
20-pin data cable connector - drive 1	J3	
20-pin data cable connector - drive 0	J4	
34-pin control cable connector - hard drive	J5	
4-pin connector - drive active LED	J6	

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS enabled	W2	open
BIOS disabled	W2	closed