


SILICON STAR INTERNATIONAL, INC. MI300

Q2/95

Data bus: 32-bit, VL-bus
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

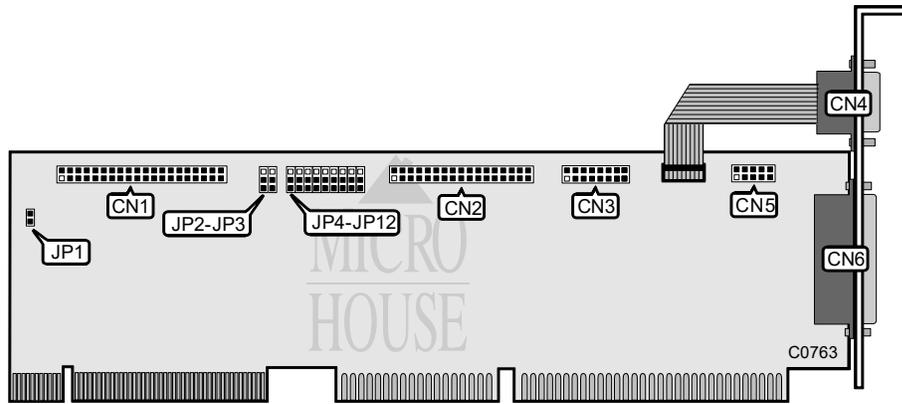

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
Game port	CN3
9-pin serial port 1 - external	CN4
10-pin serial port 2 - internal	CN5
25-pin parallel port	CN6
2-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f IDE port enabled	JP4	pins 1 & 2 closed
IDE port disabled	JP4	pins 2 & 3 closed
f Floppy drive enabled	JP7	pins 1 & 2 closed
Floppy drive disabled	JP7	pins 2 & 3 closed
f Game Port enabled	JP11	pins 1 & 2 closed
Game Port disabled	JP11	pins 2 & 3 closed

Continued on next page . . .

SILICON STAR INTERNATIONAL, INC.
MI300

... continued from previous page

HARD DRIVE SPEED		
Setting	JP2	JP3
i Speed 2	pins 1 & 2 closed	pins 2 & 3 closed
Speed 0	pins 1 & 2 closed	pins 1 & 2 closed
Speed 1	pins 2 & 3 closed	pins 2 & 3 closed
Speed 3	pins 2 & 3 closed	pins 1 & 2 closed

PARALLEL PORT CONFIGURATION		
LPT/Address	JP5	JP10
i LPT2/378h	pins 1 & 2 closed	pins 1 & 2 closed
LPT3/278h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 1 CONFIGURATION		
COM/Address	JP6	JP8
i COM1/3F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM3/3E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a

SERIAL PORT 2 CONFIGURATION		
COM/Address	JP9	JP12
i COM2/2F8h	pins 1 & 2 closed	pins 1 & 2 closed
COM4/2E8h	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 2 & 3 closed	n/a