


# HEWLETT-PACKARD COMPANY

## D2384-63031

Q2/96

Data bus: 16-bit ISA  
 Size: Half-length, full-height card  
 Hard drive supported: Two IDE(AT) drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

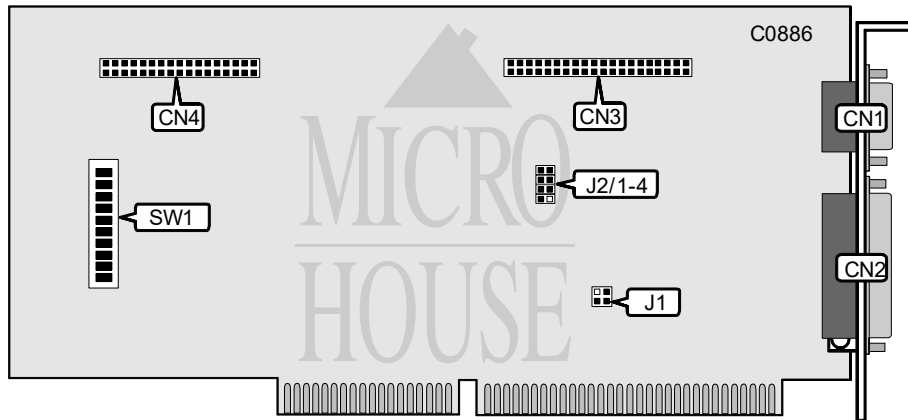

CONNECTIONS	
Function	Location
9-pin serial port 1 - external	CN1
25-pin parallel port - external	CN2
40-pin IDE(AT) connector	CN3
34-pin cable connector - floppy drive	CN4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Parallel port is LPT1	SW1/3	Closed
Parallel port is LPT2	SW1/3	Open
IDE(AT) primary address is 1F0h	SW1/4	Closed
IDE(AT) secondary address is 170h	SW1/4	Open
Floppy disk primary address is 3F0h	SW1/5	Closed
Floppy disk secondary address is 370h	SW1/5	Open
Serial Port enabled	SW1/6	Closed
Serial Port disabled	SW1/6	Open
Parallel port enabled	SW1/7	Closed
Parallel port disabled	SW1/7	Open
Note: Secondary Addresses for both floppy and IDE(AT) not supported.		

Continued on next page. . .

# HEWLETT-PACKARD COMPANY

## D2384-63031

...continued from previous page

USER CONFIGURABLE SETTINGS (CONTINUED)		
Function	Location	Setting
í IDE(AT) interface enabled	SW1/8	Closed
IDE(AT) interface disabled	SW1/8	Open
í Floppy drive interface enabled	SW1/9	Closed
Floppy drive interface disabled	SW1/9	Open
í Factory configured - do not alter	SW1/10	N/A

SERIAL PORT ADDRESS SELECTION		
COM	SW1/1	SW1/2
í COM1	Closed	Closed
COM2	Open	Closed
COM3	Closed	Open
COM4	Open	Open

SERIAL PORT INTERRUPT SELECTION				
IRQ	J2/1	J2/2	J2/3	J2/4
í IRQ4(COM1)	Closed	Open	Open	Open
IRQ3(COM2)	Open	Closed	Open	Open
IRQ10(COM3)	Open	Open	Closed	Open
IRQ11(COM4)	Open	Open	Open	Closed

Note: IRQ settings should correspond to switch settings 1 &amp; 2.

PARALLEL PORT IRQ SELECTION		
IRQ/LPT	J1/pins 1 & 2	J1/pins 3 & 4
í IRQ7(LPT1)	Closed	Open
IRQ5(LPT2)	Open	Closed

Note: IRQ settings should correspond to switch setting 3.

MISCELLANEOUS TECHNICAL NOTES
The location of SW1/1 and its open & closed positions are not identified.