


Q2/96

Data bus: 32-bit EISA
 Size: Half-length, full-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

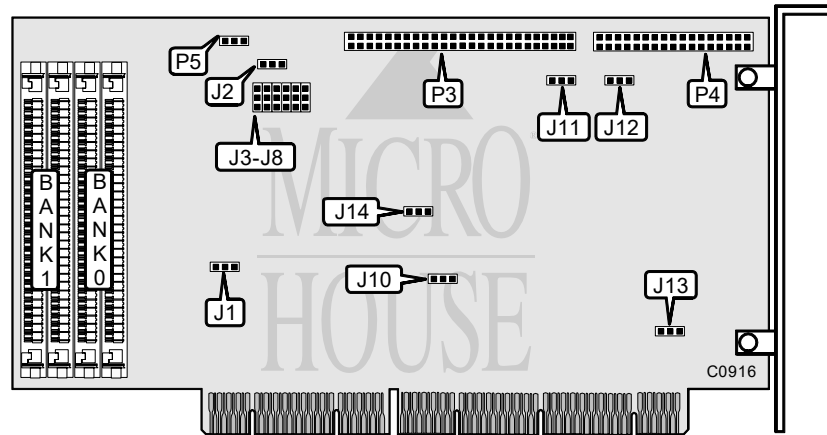

CONNECTIONS	
Function	Location
50-pin SCSI connector - internal	P3
34-pin cable connector - floppy drive	P4
3-pin connector - drive active LED	P5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
64 KB PROM enabled (276512)	J1	pins 2 & 3 closed
128KB PROM disabled (276256)	J1	pins 1 & 2 closed
Factory configured - do not alter	J2	pins 2 & 3 closed
Factory configured - do not alter	J9	pins 2 & 3 closed
IRQ14 for primary adapter enabled	J10	pins 1 & 2 closed
IRQ14 for secondary adapter disabled	J10	pins 2 & 3 closed
Floppy drive interface enabled	J11	pins 2 & 3 closed
Floppy drive interface disabled	J11	pins 1 & 2 closed
Factory configured - do not alter	J12	pins 1 & 2 closed

Continued on next page. . .

MYLEX CORPORATION DCE376 VER. 3.0

...continued from previous page

USER CONFIGURABLE SETTINGS CONTINUED		
Function	Location	Setting
Primary adapter enabled	J13	pins 1 & 2 closed
Secondary adapter enabled	J13	pins 2 & 3 closed
Factory configured - do not alter	J14	pins 1 & 2 closed
Note: The location of J9 is unidentified. Select the primary configuration if there is only one DCE376 controller in the system. If there is more than one DCE376 (disk duplexing), configure one as primary and the other as secondary.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512K	(2) 256K x 9	none
1MB	(2) 256K x 9	(2) 256 x 9
2MB	(2) 1MB x 9	none
4MB	(2) 1MB x 9	(2) 1MB x 9
8MB	(2) 4MB x 9	none

DRAM JUMPER SETTINGS						
SIMM Size	J3	J4	J5	J6	J7	J8
256KB	1 & 2	1 & 2	1 & 2	open	1 & 2	1 & 2
1MB	2 & 3	2 & 3	1 & 2	open	2 & 3	1 & 2
4MB	2 & 3	open	2 & 3	2 & 3	2 & 3	2 & 3
Note: Designated pins should be in the closed position.						

MISCELLANEOUS TECHNICAL NOTES	
The jumper settings in this document apply only to board revision E or later.	