


UNIDENTIFIED
AB-862 PLUS

Q2/95

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Two IDE (AT) interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

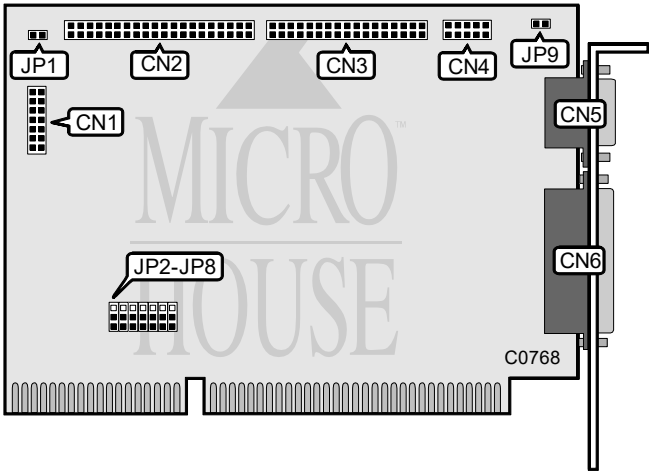

CONNECTIONS		
Function		Location
Game port		CN1
40-pin IDE (AT) Interface connector		CN2
34-pin control cable connector - floppy drive		CN3
10-pin serial port 2 - internal		CN4
9-pin serial port 1 - external		CN5
25-pin parallel port		CN6
2-pin connector - drive active LED		JP1
IOCHRDY signal connector		JP9

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
i	Serial port 1 enabled	JP2	pins 1 & 2 closed
	Serial port 1 disabled	JP2	pins 2 & 3 closed
i	Game port enabled	JP3	pins 1 & 2 closed
	Game port disabled	JP3	pins 2 & 3 closed
i	Floppy drive enabled	JP4	pins 1 & 2 closed
	Floppy drive disabled	JP4	pins 2 & 3 closed
i	Parallel port address = 378h	JP5	pins 1 & 2 closed
	Parallel port address = 278h	JP5	pins 2 & 3 closed

Continued on next page . . .

UNIDENTIFIED AB-862 PLUS

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IDE port enabled	JP6	pins 1 & 2 closed
IDE port disabled	JP6	pins 2 & 3 closed
Serial port 2 enabled	JP7	pins 1 & 2 closed
Serial port 2 disabled	JP7	pins 2 & 3 closed
Hard drive installed (enabled)	JP8	pins 1 & 2 closed
Hard drive not installed (disabled)	JP8	pins 2 & 3 closed