


PROMISE TECHNOLOGY, INC. EIDEMAX

Q3/95

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE (AT) Interface drives
 Floppy drives supported: None

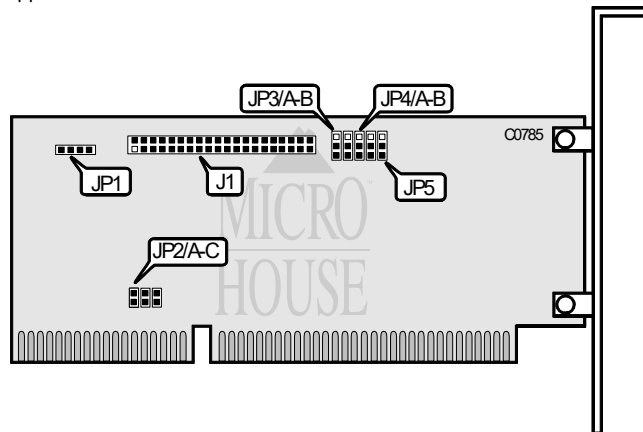

CONNECTIONS		
Function		Location
40-pin IDE(AT) interface connector		J1
4-pin connector - drive active LED		JP1

USER CONFIGURABLE SETTINGS		
Function		Location
		Setting
i IDE(AT) interface enabled	JP3/A	pins 1 & 2 closed
	JP3/A	pins 2 & 3 closed
i EIDEMAX is primary IDE(AT) interface in system	JP3/B	pins 1 & 2 closed
	JP3/B	pins 2 & 3 closed
i On-board BIOS enabled	JP5	pins 1 & 2 closed
	JP5	pins 2 & 3 closed

INTERRUPT SELECTION			
IRQ	JP2/A	JP2/B	JP2/C
i IRQ15	closed	open	open
IRQ12	open	open	closed
IRQ14	open	closed	open

Continued on next page. . .

PROMISE TECHNOLOGY, INC.
EIDEMAX

...continued from previous page

BASE MEMORY ADDRESS SELECTION		
Address	JP4/A	JP4/B
í D0000h	pins 2 & 3 closed	pins 2 & 3 closed
D4000h	pins 2 & 3 closed	pins 1 & 2 closed
D8000h	pins 1 & 2 closed	pins 2 & 3 closed
DC000h	pins 1 & 2 closed	pins 1 & 2 closed