


UNIDENTIFIED  
MIO-AT

Q3/95

Data bus: 16-bit, ISA  
Size: Three/quarter-length, full-height card  
Hard drive supported: Two IDE(AT) interface drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

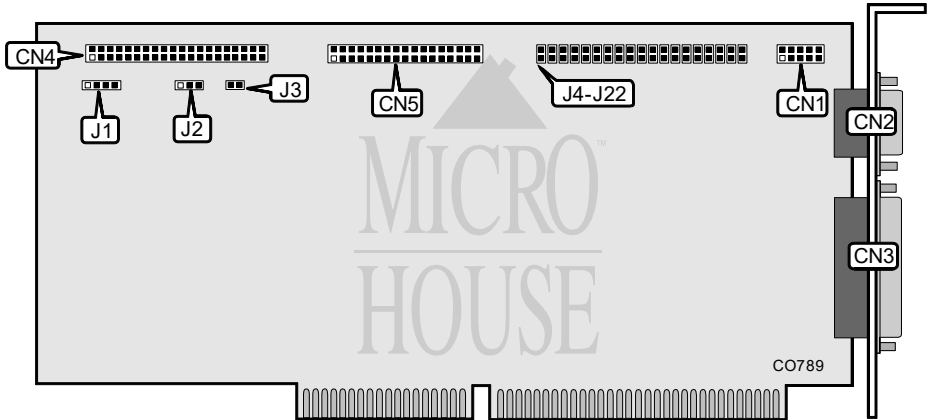

CONNECTIONS	
Function	Location
10-pin serial port 2 - internal	CN1
9-pin serial port 1 - external	CN2
25-pin parallel port - external	CN3
40-pin IDE(AT) connector	CN4
34-pin floppy drive connector	CN5
4-pin connector - drive active LED	J1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IRQ14 delayed	J2/pins 1 & 2	closed
IRQ14 fixed drive	J2/pins 2 & 3	closed
Note: J3 enabled/disabled IOCHRDY signal - setting is unidentified.		

Continued on next page. . .

# UNIDENTIFIED MIO-AT

...continued from previous page

SERIAL PORTS CONFIGURATION					
Port 1	Port 2	J4	J5	J19	J21
COM1(3F8h)	COM2(2F8h)	open	closed	closed	closed
COM3(3E8h)	COM4(2E8h)	closed	open	closed	closed
Disabled	Enabled	N/A	N/A	open	closed
Enabled	Disabled	N/A	N/A	closed	open
Disabled	Disabled	N/A	N/A	open	open

PARALLEL PORT CONFIGURATION				
LPT	J17	J18	J20	J22
LPT2	closed	open	closed	open
LPT3	open	closed	open	closed
LPT2 disabled	N/A	N/A	open	N/A
LPT3 disabled	N/A	N/A	N/A	open

SERIAL PORT 1 INTERRUPT SELECTION				
IRQ	J13	J14	J15	J16
í 4	open	closed	open	open
2	open	open	open	closed
3	open	open	closed	open
5	closed	open	open	open

SERIAL PORT 2 INTERRUPT SELECTION				
IRQ	J9	J10	J11	J12
í 3	open	closed	open	open
2	closed	open	open	open
4	open	open	closed	open
5	open	open	open	closed

PARALLEL PORT INTERRUPT SELECTION			
IRQ	J6	J7	J8
í 5	open	closed	open
2	open	open	closed
7	closed	open	open