


UNITED MICROELECTRONICS CORPORATION

FSIO-UC3 (V1.2)

Data Bus	16-bit ISA
Card Size	Half-length, half-height card
Hard Drives supported	Two IDE (AT) drives
Floppy drives supported	Two 360KB, 720KB, 1.2MB, or 1.44MB drives

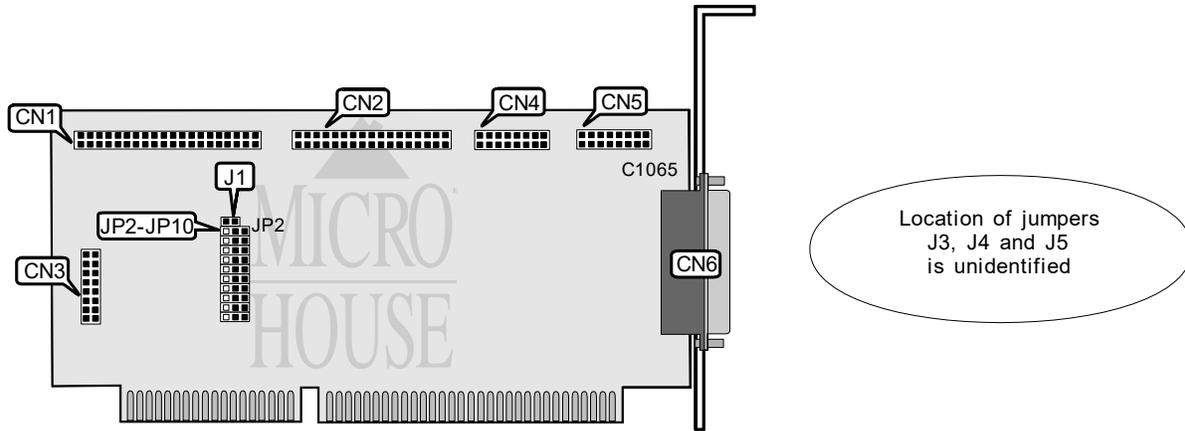

CONNECTIONS			
Function	Location	Function	Location
40-pin IDE(AT) connector	CN1	10-pin serial port 2 - internal	CN5
34-pin cable connector - floppy drive	CN2	25-pin parallel port - external	CN6
16-pin game port	CN3	4-pin connector - drive active LED	J2
10-pin serial port 1 - internal	CN4		

Note: The location of JP2 is unidentified.

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í IOCHRDY signal enabled	J1	Open	
IOCHRDY signal disabled	J1	Closed	
Parallel port IRQ5 select	J3	Pins 1 & 2 closed	
Parallel port IRQ7 select	J3	Pins 2 & 3 closed	
Serial port 1 IRQ11 select	J4	Pins 1 & 2 closed	
Serial port 1 IRQ4 select	J4	Pins 2 & 3 closed	
Serial port 2 IRQ10 select	J5	Pins 1 & 2 closed	
Serial port 2 IRQ3 select	J5	Pins 2 & 3 closed	
í Serial port 2 enabled	JP2	Pins 1 & 2 closed	
Serial port 2 disabled	JP2	Pins 2 & 3 closed	
í Game port enabled	JP3	Pins 1 & 2 closed	
Game port disabled	JP3	Pins 2 & 3 closed	
í Serial port 1 COM1 select	JP4	Pins 1 & 2 closed	
Serial port 1 COM3 select	JP4	Pins 2 & 3 closed	
í Parallel port LPT2 select	JP5	Pins 1 & 2 closed	
Parallel port LPT3 select	JP5	Pins 2 & 3 closed	
í Serial port 1 enabled	JP6	Pins 1 & 2 closed	
Serial port 1 disabled	JP6	Pins 2 & 3 closed	

Continued on next page. . .

UNITED MICROELECTRONICS CORPORATION

FSIO-UC3 (V1.2)

...continued from previous page

USER CONFIGURABLE SETTINGS (CONTINUED)		
Function	Label	Position
í Floppy drive interface enabled	JP7	Pins 1 & 2 closed
Floppy drive interface disabled	JP7	Pins 2 & 3 closed
í Factory configured - do not alter	JP8	Unidentified
í IDE(AT) interface enabled	JP9	Pins 1 & 2 closed
IDE(AT) interface disabled	JP9	Pins 2 & 3 closed
í Factory configured - do not alter	JP10	Unidentified

Note: The jumper used to set COM PORTS for the Secondary Serial Port is unidentified.