
Q3/95

## DTK COMPUTER, INC. PTI-213

Data bus: 16-bit ISA

Three/quarter-length, full-height card Size: Hard drive supported: Two MFM ST506/412 drives

Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB drives

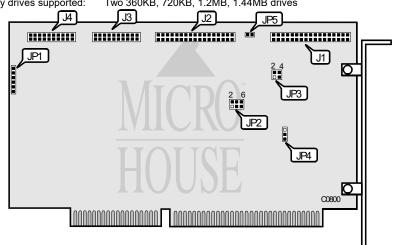

CONNECTIONS		
Function	Location	
34-pin connector - floppy drive interface	J1	
34-pin control cable connector - hard drive	J2	
20-pin data cable connector - drive 0	J3	
20-pin data cable connector - drive 1	J4	
6-pin connector - drive active LED	JP1	

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive type AT select	JP4	pins 1 & 2 closed
Floppy drive type PS/2 select	JP4	pins 1 & 2 closed
í PTI-213 is primary hard drive adapter in system (170 - 177h)	JP2	pins 2 & 4 closed
PTI-213 is secondary hard drive adapter in system (1F0 -	JP2	pins 4 & 6 closed
1F7h)		
í PTI-213 is primary floppy drive adapter in system (390 - 37Fh)	JP2	pins 1 & 3 closed
PTI-213 is secondary floppy drive adapter in system (3F0 -	JP2	pins 3 & 5 closed
3F7h)		

FLOPPY DRIVE CONFIGURATION			
Setting	JP3	JP5	
í Enabled	pins 1 & 2, 3 & 4 closed	closed	
Disabled	all open	open	

Copyright © 1991, 1992, 1993 by Micro House Int'l (800) 926-8299. Research Dept. (303) 443-3389