


WESTERN DIGITAL CORPORATION
WD1004A-WX1 (REV. A)

Data bus:	8-bit, PC/AT, PC/AT
Size:	Half-length, full-height card
Hard drives supported:	Two MFM ST506/412 drives
Floppy drives supported:	None
Maximum heads/cyl.:	16 heads and 1024 cylinders

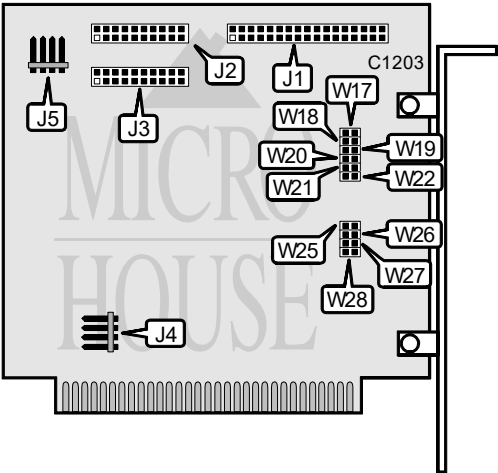

CONNECTIONS	
Function	Location
34-pin control cable connector-hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
5-pin connector-DC power	J4
4-pin connector-drive active LED	J5

Continued on next page . . .

WESTERN DIGITAL CORPORATION
WD1004A-WX1 (REV. A)

... continued from previous page

I/O PORT & BIOS ADDRESS			
I/O Port Address	BIOS Address	W21	W22
320-323h	C8000-C9FFFh	open	open
324-327h	CA000-CBFFFh	closed	open
328-32Bh	CC000-CDFFFh	open	closed
32C-32Fh	CE000-CFFFFh	closed	closed
Note: The function of W17-W20 & W25-W28 is unidentified.			

MISCELLANEOUS TECHNICAL NOTES
This controller has a built-in low-level format program. To enter the program run the DEBUG utility supplied with DOS and at the prompt enter: G=C800:5.