


ULTRASTOR CORPORATION  
ULTRA 34FB

Q3/95

Data bus: 32-bit VL-Bus  
Size: Three/quarter-length, half-height card  
Hard drive supported: Up to seven SCSI drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

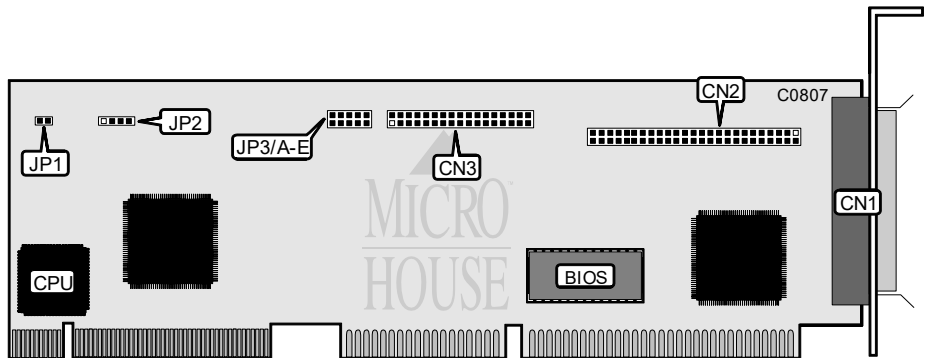

| CONNECTIONS                           |          |
|---------------------------------------|----------|
| Function                              | Location |
| 50-pin SCSI connector - external      | CN1      |
| 50-pin SCSI connector - internal      | CN2      |
| 34-pin cable connector - floppy drive | CN3      |
| 2-pin connector - drive active LED    | JP1      |
| 4-pin connector - speaker             | JP2      |

| USER CONFIGURABLE SETTINGS          |          |         |
|-------------------------------------|----------|---------|
| Function                            | Location | Setting |
| i Floppy drive enabled              | JP3/A    | closed  |
| Floppy drive disabled               | JP3/A    | open    |
| i Factory configured - do not alter | JP3/E    | open    |

Continued on next page. . .

# ULTRASTOR CORPORATION

## ULTRA 34FB

...continued from previous page

| BASE I/O ADDRESS |        |        |        |
|------------------|--------|--------|--------|
| Address          | JP3/B  | JP3/C  | JP3/D  |
| i 330h           | closed | closed | closed |
| 130h             | open   | open   | closed |
| 134h             | open   | open   | open   |
| 230h             | open   | closed | closed |
| 234h             | open   | closed | open   |
| 334h             | closed | open   | closed |