
ULTRASTOR CORPORATION ULTRA 34C

Data bus: 32-bit VL-Bus

Size: Full-length, half-height card Hard drive supported: Up to seven SCSI drives

Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB, or 2.88MB drives

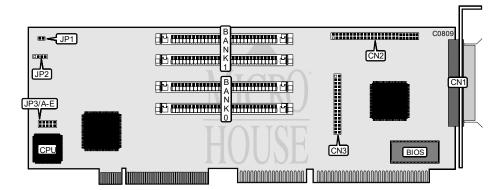

CONNECTIONS		
Function	Location	
50-pin SCSI connector - external	CN1	
50-pin SCSI connector - internal	CN2	
34-pin cable connector - floppy drive	CN3	
2-pin connector - drive active LED	JP1	
4-pin connector - speaker	JP2	

USER CONFIGURABLE SETTINGS				
Function	Location	Setting		
í Floppy drive enabled	JP3/A	closed		
Floppy drive disabled	JP3/A	open		
í Factory configured - do not alter	JP3/E	open		

Continued on next page. . .

Q3/95

ULTRASTOR CORPORATION ULTRA 34C

. . .continued from previous page

BASE I/O ADDRESS					
Address	JP3/B	JP3/C	JP3/D		
í 330h	closed	closed	closed		
130h	open	open	closed		
134h	open	open	open		
230h	open	closed	closed		
234h	open	closed	open		
334h	closed	open	closed		

CACHE MEMORY CONFIGURATION				
Size	Bank 0	Bank 1		
512KB	(2) 256K x 9	NONE		
1MB	(2) 256K x 9	(2) 256K x 9		
2MB	(2) 1MB x 9	NONE		
2.5MB	(2) 1MB x 9	(2) 256K x 9		
4MB	(2) 1MB x 9	(2) 1MB x 9		
8MB	(2) 4MB x 9	NONE		
8.5MB	(2) 4MB x 9	(2) 256K x 9		
10MB	(2) 4MB x 9	(2) 1MB x 9		
16MB	(2) 4MB x 9	(2) 4MB x 9		