


UNIDENTIFIED
IODE-3292U

Q4/95

Data bus: 16-bit ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE(AT) drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

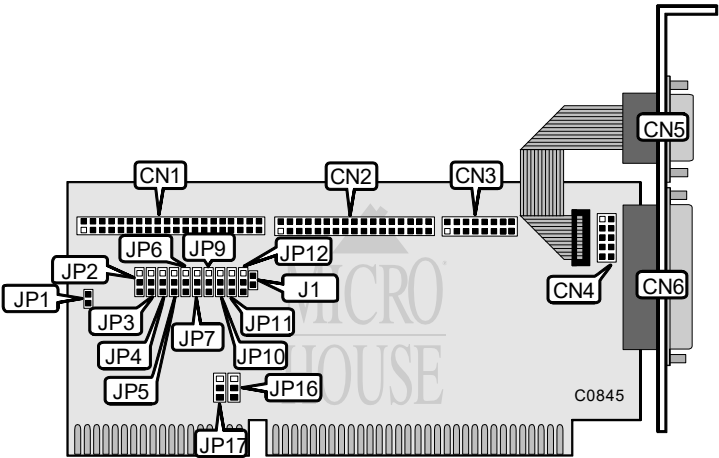

CONNECTIONS	
Function	Location
40-pin IDE(AT) connector	CN1
34-pin cable connector - floppy drive	CN2
16-pin game port	CN3
10-pin serial port 2 - internal	CN4
9-pin serial port 1 - external, 10-pin serial port 1 - internal	CN5
25-pin parallel port - external	CN6
2-pin connector - drive active LED	JP1

Continued on next page. . .

UNIDENTIFIED IODE-3292U

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Floppy drive interface enabled	JP2/pins 1 & 2	closed
Floppy drive interface disabled	JP2/pins 2 & 3	closed
Parallel port enabled	JP3/pins 1 & 2	closed
Parallel port disabled	JP3/pins 2 & 3	closed
Serial port 1 enabled	JP4/pins 1 & 2	closed
Serial port 1 disabled	JP4/pins 2 & 3	closed
Serial port 2 enabled	JP5/pins 1 & 2	closed
Serial port 2 disabled	JP5/pins 2 & 3	closed
Game port enabled	JP6/pins 1 & 2	closed
Game port disabled	JP6/pins 2 & 3	closed
IDE(AT) interface enabled	JP7/pins 1 & 2	closed
IDE(AT) interface disabled	JP7/pins 2 & 3	closed
Parallel port address 378h select	JP9/pins 1 & 2	closed
Parallel port address 278h select	JP9/pins 2 & 3	closed
Serial port 1 COM1 (3F8h) select	JP10/pins 1 & 2	closed
Serial port 1 COM3 (3E8h) select	JP10/pins 2 & 3	closed
Serial port 2 COM2 (2F8h) select	JP11/pins 1 & 2	closed
Serial port 2 COM4 (2E8h) select	JP11/pins 2 & 3	closed
IDE address is 1F0h	JP12/pins 1 & 2	closed
IDE address is 170h	JP12/pins 2 & 3	closed
Serial port 1 IRQ4 select	JP16/pins 1 & 2	closed
Serial port 1 IRQ3 select	JP16/pins 2 & 3	closed
Serial port 2 IRQ3 select	JP17/pins 1 & 2	closed
Serial port 2 IRQ4 select	JP17/pins 2 & 3	closed

MISCELLANEOUS TECHNICAL NOTES	
The purpose of J1 is unidentified.	