


PROMISE TECHNOLOGY, INC.

EIDEMAX REV. B

Q4/95

Data bus: 16-bit ISA
 Size: Half-length, half-height card
 Hard drive supported: Two EIDE (AT) Interface drives
 Floppy drives supported: None

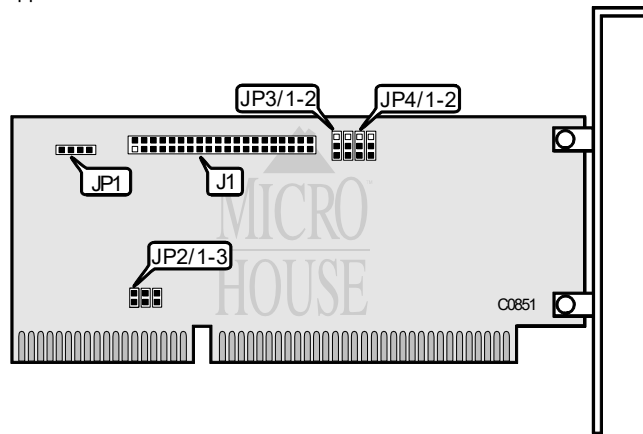

CONNECTIONS	
Function	Location
40-pin EIDE(AT) interface connector	J1
4-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Factory configured - do not alter	JP3/1	pins 1 & 2 closed
EIDEMAX is secondary IDE(AT) interface in system	JP3/2	pins 1 & 2 closed
EIDEMAX is primary IDE(AT) interface in system	JP3/2	pins 2 & 3 closed

INTERRUPT SELECTION			
IRQ	JP2/1	JP2/2	JP2/3
15	closed	open	open
12	open	open	closed
14	open	closed	open

BASE MEMORY ADDRESS SELECTION		
Address	JP4/1	JP4/2
D0000h	pins 2 & 3 closed	pins 2 & 3 closed
D4000h	pins 2 & 3 closed	pins 1 & 2 closed
D8000h	pins 1 & 2 closed	pins 2 & 3 closed
DC000h	pins 1 & 2 closed	pins 1 & 2 closed