


ADAPTEC, INC.
AHA-2944W

Q4/95

Data bus: 32-bit PCI
Size: Half-length, full-height card
Hard drive supported: Up to fifteen SCSI-2 devices
Floppy drives supported: None

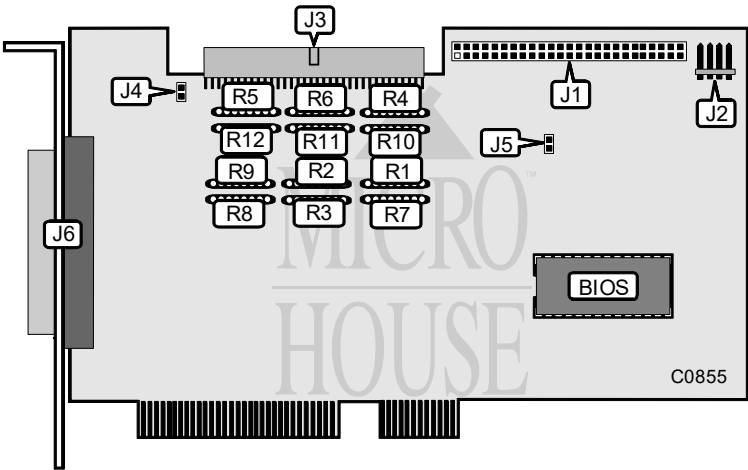

CONNECTIONS	
Function	Location
50-pin SCSI connector - internal	J1
4-pin connector - drive active LED	J2
68-pin SCSI connector - internal	J3
68-pin SCSI connector - external	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Termination power for J3, when power off enabled	J4	closed
Termination power for J3, when power off disabled	J4	open
Termination power for J1, when power off enabled	J5	closed
Termination power for J1, when power off disabled	J5	open
Low byte & high byte set to off	R1-R12	removed
Low byte & high byte set to on	R1-R12	installed
Low byte set to off, high byte set to on	R9, R12, R3, R6	installed
	R1, R2, R4, R5, R7, R8, R10, R11	removed

Continued on next page. . .

ADAPTEC, INC.
AHA-2944W

...continued from previous page

MISCELLANEOUS TECHNICAL NOTES

R1, R2, R9, R10, R11, R12 are 330-ohm. R3, R4, R5, R6, R7, R8 are 150-ohm.
When using only the 68-pin external connector low & high bytes must be set to on.
When using the 68-pin internal & external connectors or when using the 50-pin & 68-pin internal
connectors low byte must be set to off, high byte to on.
When using the 50-pin internal & 68-pin external low & high bytes must be set to off.