


ACER, INC.  
8302

Q4/95

Data bus: 16-bit ISA  
Size: Half-length, full-height card  
Hard drive supported: Two IDE(AT) drives  
Floppy drives supported: None

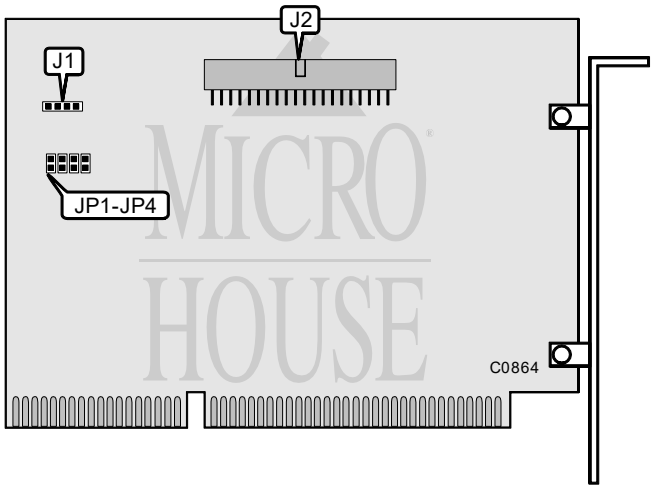

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
40-pin IDE(AT) connector	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i IDE primary address is 1F0h	JP1	open
IDE secondary address is 170h	JP1	closed
i IOCHRDY signal enabled	JP2	closed
IOCHRDY signal disabled	JP2	open
i Factory configured - do not alter	JP3	N/A
i Factory configured - do not alter	JP4	N/a

MISCELLANEOUS TECHNICAL NOTES
The 8302 supports two types of drives: Conner CP344 & Miniscribe 8051A.