


UNIDENTIFIED
AB-862G SUPER I/O CARD

Q4/95

Data bus: 16-bit ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE(AT) drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

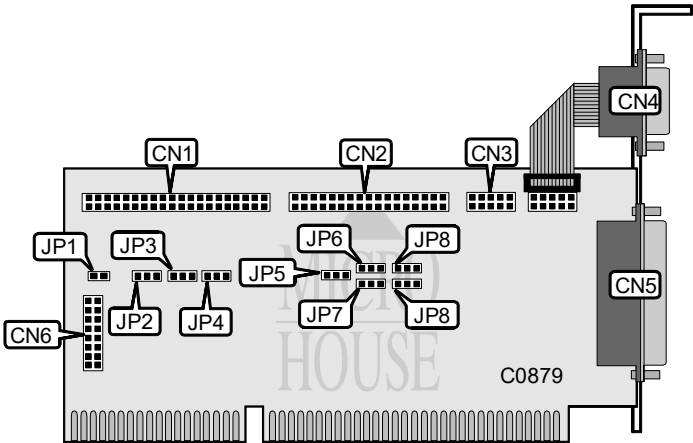

CONNECTIONS		
Function		Location
40-pin primary IDE(AT) connector		CN1
34-pin cable connector - floppy drive		CN2
10-pin serial port 2 - internal		CN3
9-pin serial port 1 - external, 10-pin serial port 1 internal		CN4
25-pin parallel port - external		CN5
16-pin game port		CN6
2-pin connector - drive active LED		JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Hard disk is present	JP2	pins 1 & 2 closed
Hard disk is not present	JP2	pins 2 & 3 closed
Game port enabled	JP3	pins 1 & 2 closed
Game port disabled	JP3	pins 2 & 3 closed
Floppy drive interface enabled	JP4	pins 1 & 2 closed
Floppy drive interface disabled	JP4	pins 2 & 3 closed
IOCHRDY signal enabled	JP5	pins 1 & 2 closed
IOCHRDY signal disabled	JP5	pins 2 & 3 closed

Continued on next page. . .

UNIDENTIFIED AB-862G SUPER I/O CARD

. . .continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IDE interface enabled	JP6	pins 1 & 2 closed
IDE interface disabled	JP6	pins 2 & 3 closed
Serial port 1 enabled	JP7	pins 1 & 2 closed
Serial port 1 disabled	JP7	pins 2 & 3 closed
Parallel port address is 378h	JP8	pins 1 & 2 closed
Parallel port address is 278h	JP8	pins 2 & 3 closed
Serial port 2 enabled	JP9	pins 1 & 2 closed
Serial port 2 disabled	JP9	pins 2 & 3 closed