


HEWLETT-PACKARD COMPANY

D1682A

Q2/96

Data bus: 16-bit ISA
 Size: Three-quarter length, full-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: None

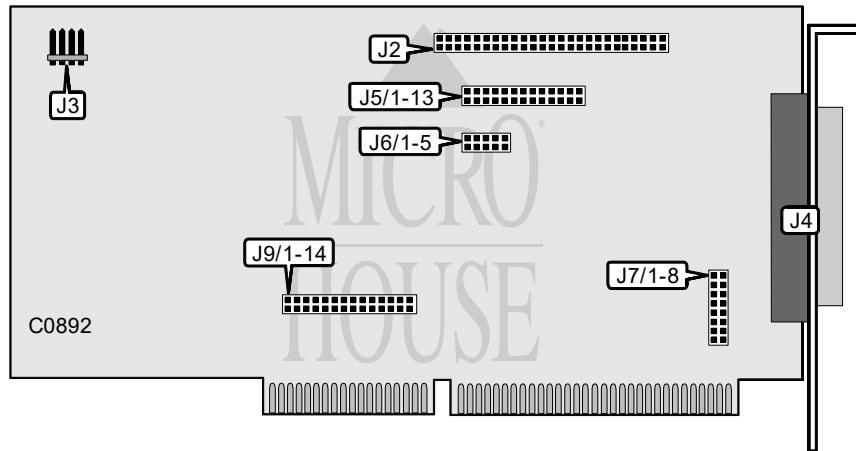

CONNECTIONS	
Function	Location
SCSI connector - internal	J2
4-pin connector-drive active LED	J3
SCSI connector - external	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
if Synchronous negotiation enabled	J5/1	closed
Synchronous negotiation disabled	J5/1	open
if BIOS enabled	J6/1	closed
BIOS disabled	J6/1	open

DMA SELECTION			
Channel	J5/8	J9/2	J9/6
5	closed	closed	closed
Note: No other settings were provided by manufacturer.			

Continued on next page. . .

HEWLETT-PACKARD COMPANY

D1682A

...continued from previous page

I/O PORT ADDRESS SELECTION			
Address	J7/2	J7/3	J7/4
330h	closed	open	open
130h	closed	open	closed
134h	open	open	closed
230h	closed	closed	open
234h	open	closed	open
334h	open	open	open

I/O PORT INTERRUPT SELECTION			
IRQ	J5/9	J5/10	J5/11
IRQ11	open	closed	open
IRQ9	open	open	open
IRQ10	closed	open	open
IRQ12	closed	closed	open
IRQ14	open	open	closed
IRQ15	closed	open	closed

I/O PORT INTERRUPT SELECTION (CONTINUED)						
IRQ	J9/9	J9/10	J9/11	J9/12	J9/13	J9/14
IRQ11	open	open	closed	open	open	open
IRQ9	closed	open	open	open	open	open
IRQ10	open	closed	open	open	open	open
IRQ12	open	open	open	closed	open	open
IRQ14	open	open	open	open	closed	open
IRQ15	open	open	open	open	open	closed

MISCELLANEOUS TECHNICAL NOTES	
The only ISA SCSI Host Adapter address supported by Hewlett Packard is device address 7. Jumpers not specified in this document are factory configured.	