


HEWLETT-PACKARD COMPANY

D1664A

Q2/96

Data bus: 16-bit ISA
 Size: Three-quarter length, full-height card
 Hard drive supported: Two ESDI drives
 Floppy drives supported: None

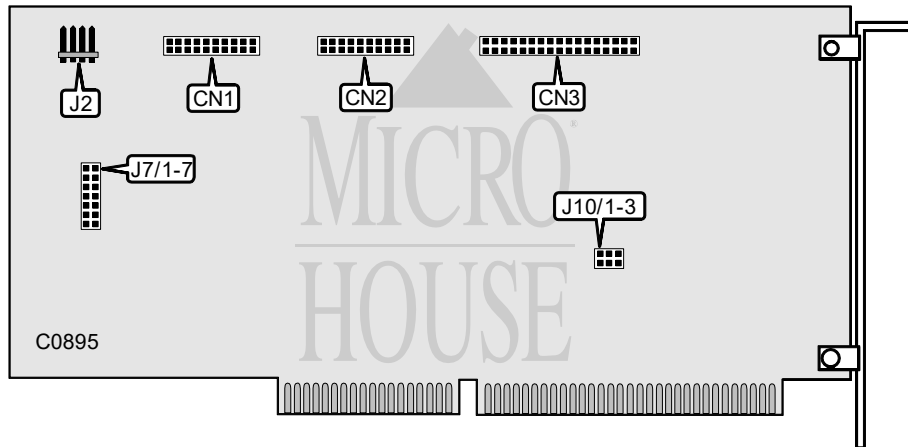

CONNECTIONS	
Function	Location
20-pin data cable connector	CN1
20-pin data cable connector	CN2
34-pin control cable connector - hard drive	CN3
4-pin connector - drive active LED	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Hard disk primary address is 1F0h	J10/1	open
Hard disk secondary address is 170h (not supported)	J10/1	closed
Logical drive splitting enabled	J7/2	closed
Logical drive splitting disabled	J7/2	open
Note: Other jumper settings not specified.		

MISCELLANEOUS TECHNICAL NOTES
A second hard disk cannot be installed when logical drive splitting is enabled. IRQ 14 is used by this controller.