


MYLEX CORPORATION
DAC960E

Q2/96

Data bus: 32-bit EISA
Size: Three-quarter length, full-height card
Hard drive supported: Up to twenty-one Fast SCSI-2 devices
Floppy drives supported: None

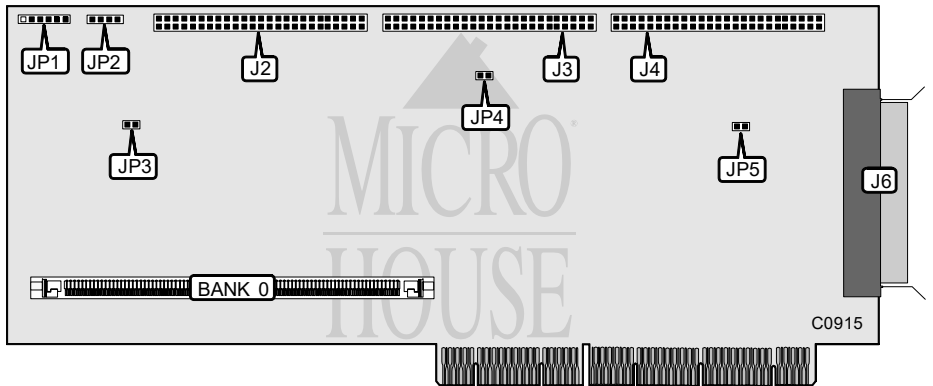

CONNECTIONS	
Function	Location
50-pin SCSI channel 2 connector - internal	J2
50-pin SCSI channel 1 connector - internal	J3
50-pin SCSI channel 0 connector - internal	J4
50-pin SCSI channel 0 connector - external	J6
2-pin connector - SCSI active LED	JP1/pins 1 & 2
2-pin connector - EISA active LED	JP1/pins 3 & 4
2-pin connector - write pending LED	JP1/pins 5 & 6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Factory configured - do not alter	JP2	N/A
i Termination power enabled for SCSI channel 2	JP3	closed
Termination power disabled for SCSI channel 2	JP3	open
i Termination power enabled for SCSI channel 1	JP4	closed
Termination power disabled for SCSI channel 1	JP4	open
i Termination power enabled for SCSI channel 0	JP5	closed
Termination power disabled for SCSI channel 0	JP5	open
Note: Enable termination power when the controller is installed at one end of a channel and disable termination power when a channel is not at the end of SCSI cable. When both connectors J4 and J6 use channel 0, disable termination to that channel.		

Continued on next page. . .

MYLEX CORPORATION

DAC960E

Continued on next page. . .

DRAM CONFIGURATION	
Size	Bank 0
2MB	(1) 512 x 36
4MB	(1) 1M x 36
8MB	(1) 2M x 36
16MB	(1) 4M x 36
32MB	(1) 8M x 36