


ATC/UNITRON COMPUTERS & COMPUTER PARTS

U 4805 PCI/CACHE

Data Bus
Card Size
Hard Drives supported
Floppy drives supported

32-bit PCI
Half-length, full-length card
Four IDE(AT) drives
None

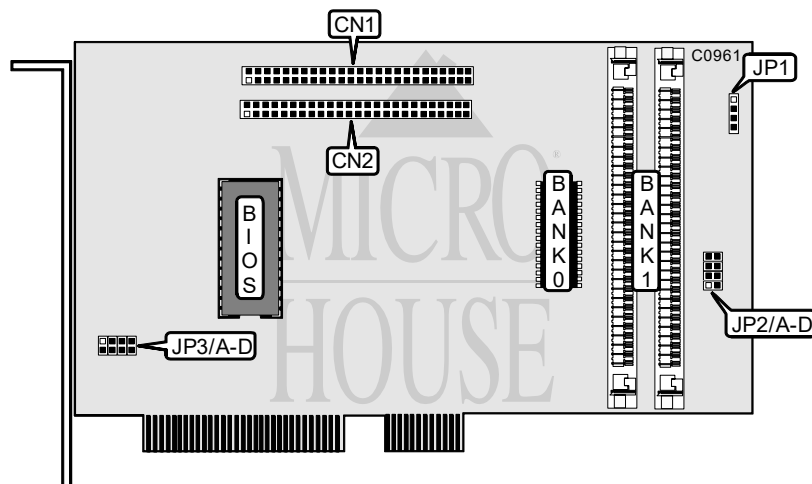

CONNECTIONS			
Function	Location	Function	Location
40-pin primary IDE(AT) connector	CN1	4-pin connector - drive active LED	JP1
40-pin secondary IDE(AT) connector	CN2		

BIOS ADDRESS SELECTION			
Address	JP2/A	JP2/B	
C8000h	Closed	Closed	
CC000h	Closed	Open	
D8000h	Open	Closed	
DC000h	Open	Open	

BASE I/O ADDRESS SELECTION			
Address	JP2/C	JP2/D	
168h	Closed	Closed	
170h	Open	Closed	
1E8h	Closed	Open	
1F0h	Open	Open	

PCI INTERRUPT SELECTION				
INT	JP3/A	JP3/B	JP3/C	JP3/D
INTA	Closed	Open	Open	Open
INTB	Open	Closed	Open	Open
INTC	Open	Open	Closed	Open
INTD	Open	Open	Open	Closed

Continued on next page. . .

ATC/UNITRON COMPUTERS & COMPUTER PARTS

U 4805 PCI/CACHE

. . .continued from previous page

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(1)512KB x 9	None
1MB	(1)512KB x 9	(2) 256KB x 9
2.5MB	(1)512KB x 9	(2) 1MB x 9
8.5MB	(1)512KB x 9	(2) 4MB x 9