


OLIVETTI
ASC-2 (EXM3A)

Q3/96

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: None

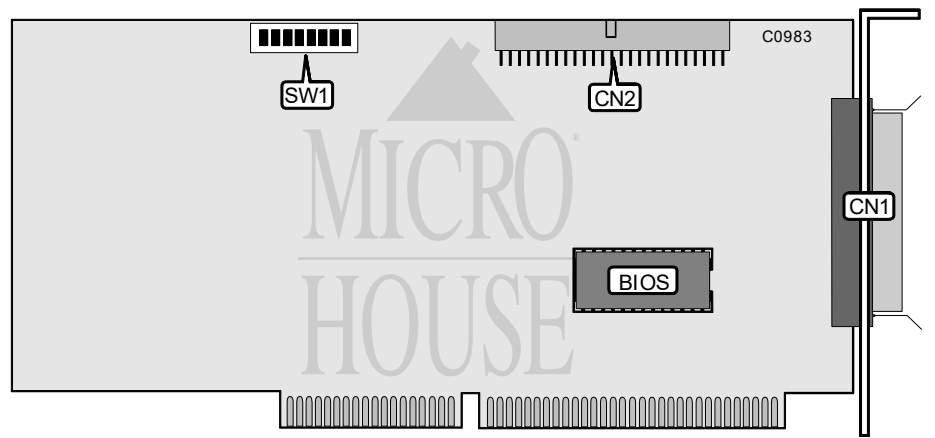

CONNECTIONS	
Function	Location
SCSI drive interface (50 pin) internal	CN1
SCSI drive interface (50 pin) external	CN2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i SCSI Terminators controlled by software	SW1/1	Off
SCSI Terminators configured without software	SW1/1	On
i Factory configured - do not alter	SW1/5	N/A

Continued on next page . . .

OLIVETTI

ASC-2 (EXM3A)

. . . continued from previous page

SCSI PORT ADDRESS CONFIGURATION			
Address	SW1/2	SW1/3	SW1/4
130-133h	Off	Off	On
134-137h	On	Off	On
230-233h	Off	On	Off
234-237h	On	On	Off
330-333h	Off	Off	Off
334-337h	On	Off	Off

BIOS ADDRESS CONFIGURATION			
Address	SW1/6	SW1/7	SW1/8
C8000h	Off	On	On
CC000h	On	Off	On
D0000h	Off	Off	On
D4000h	On	On	Off
D8000h	Off	On	Off
DC000h	Off	Off	Off
Disabled	On	On	On

MISCELLANEOUS TECHNICAL NOTES	
The location of first switch setting on SW1 is not available.	