


AST RESEARCH, INC. AST ETHERNODE (202246-001)

Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Not available

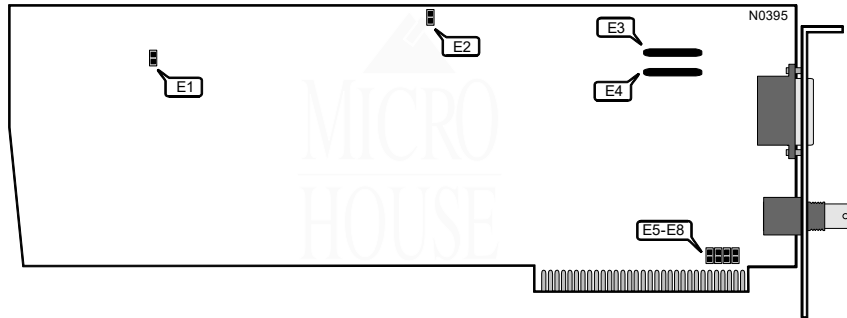

SLEEP MODE	
Setting	E2
Disabled	Closed
Enabled	Open
Note: When sleep mode is enabled the card is disabled. The card cannot be accessed by the computer or the network. This option is provided to simplify trouble shooting system conflicts.	

CABLE TYPE		
Type	E3	E4
RG-58A/U 50ohm coaxial	Open	Closed
AUI transceiver via DB-15 port	Closed	Open
Note: E3 and E4 are not jumpers, they are receptacles for a terminating resistor. In this case open means that the resistor is not installed while closed would mean that the resistor is installed.		

Continued on next page . . .

AST RESEARCH, INC.

AST ETHERNODE (202246-001)

... continued from previous page

CARD ID				
Setting	E5	E6	E7	E8
íA	Closed	Open	Open	Open
B	Open	Closed	Open	Open
C	Open	Open	Closed	Open
D	Open	Open	Open	Closed
Note: Up to four cards can be installed at once into the same system. If more than one card is installed in the system, each must have a distinct ID.				

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
E1	Closed

MISCELLANEOUS NOTES
To completely configure this card, the software that comes with it must be used..