


UNITED MICROELECTRONICS CORPORATION

FSIO-UC3 (V1.1)

Data Bus
Card Size
Hard Drives supported
Floppy drives supported

16-bit ISA
Half-length, half-height card
Two IDE (AT) drives
Two 360KB, 720KB, 1.2MB, or 1.44MB drives

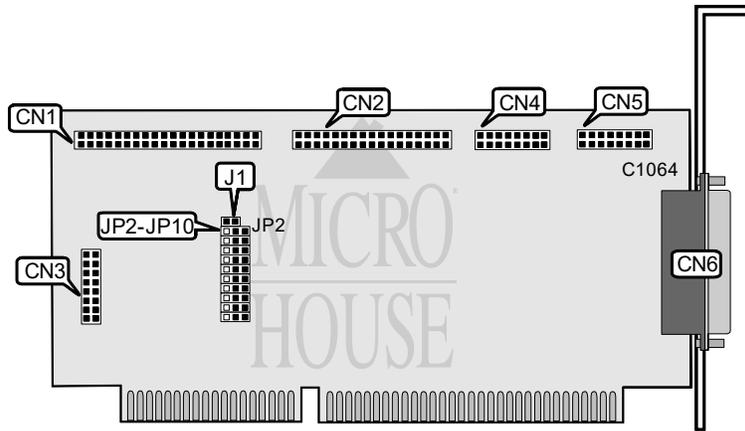

CONNECTIONS			
Function	Location	Function	Location
40-pin IDE(AT) connector	CN1	10-pin serial port 2 - internal	CN5
34-pin cable connector - floppy drive	CN2	25-pin parallel port - external	CN6
16-pin game port	CN3	4-pin connector - drive active LED	J2
10-pin serial port 1 - internal	CN4		

Note: The location of J2 is unidentified.

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
IOCHRDY signal disabled	J1	Closed	
IOCHRDY signal enabled	J1	Open	
Serial port 2 enabled	JP2	Pins 1 & 2 closed	
Serial port 2 disabled	JP2	Pins 2 & 3 closed	
Game port enabled	JP3	Pins 1 & 2 closed	
Game port disabled	JP3	Pins 2 & 3 closed	
í Factory configured - do not alter	JP4	Unidentified	
Parallel port I/O address is 378-37Fh	JP5	Pins 1 & 2 closed	
Parallel port I/O address is 278-27Fh	JP5	Pins 2 & 3 closed	
Serial port 1 enabled	JP6	Pins 1 & 2 closed	
Serial port 1 disabled	JP6	Pins 2 & 3 closed	
Floppy drive interface enabled	JP7	Pins 1 & 2 closed	
Floppy drive interface disabled	JP7	Pins 2 & 3 closed	
í Factory configured - do not alter	JP8	Unidentified	
IDE(AT) interface enabled	JP9	Pins 1 & 2 closed	
IDE(AT) interface disabled	JP9	Pins 2 & 3 closed	
í Factory configured - do not alter	JP10	Unidentified	