PROMISE TECHNOLOGY, INC.
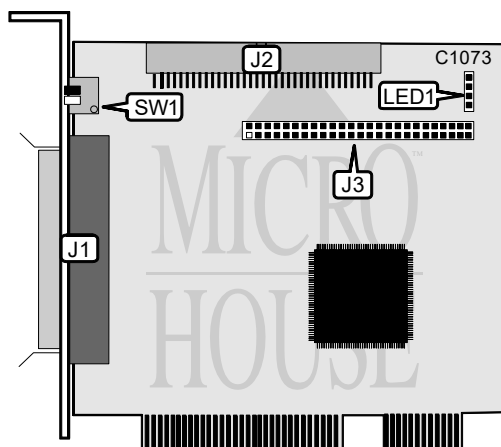# S C S I M A X   P R E M I E R   S C S I
S C S I   U L T R A   P R E M I E R   S C S I

Data Bus	32-bit PCI
Card Size	Half-height, quarter-length card
Hard Drives supported	Up to 15 Fast & Wide SCSI 2 drives (SCSIMAX)
	Up to 15 Ultra SCSI-2/SCSI-3 drives (SCSIULTRA)
Floppy drives supported	None

CONNECTIONS			
Function	Location	Function	Location
68-pin SCSI connector - external	J1	50-pin SCSI connector - internal	J3
68-pin SCSI connector - internal	J2	4-pin connector - drive active LED	LED1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í The termination is enabled	SW1	On
The termination is disabled	SW1	Off
Note: Facing the bracket, SW1 'On' position is to the left and 'Off' position is to the right.		

MISCELLANEOUS TECHNICAL NOTES
Note: When combining internal and external devices, only one of the internal connectors can be used.