


# WESTERN DIGITAL CORPORATION

## WD1003-WA2

<b>Chipset</b>	Western Digital
<b>Data Bus</b>	16-bit ISA
<b>Card Size</b>	Full height, three-quarters length
<b>Hard Drives Supported</b>	Two ST506/412(MFM) devices
<b>Floppy Drives Supported</b>	Two 360KB or 1.2MB drives

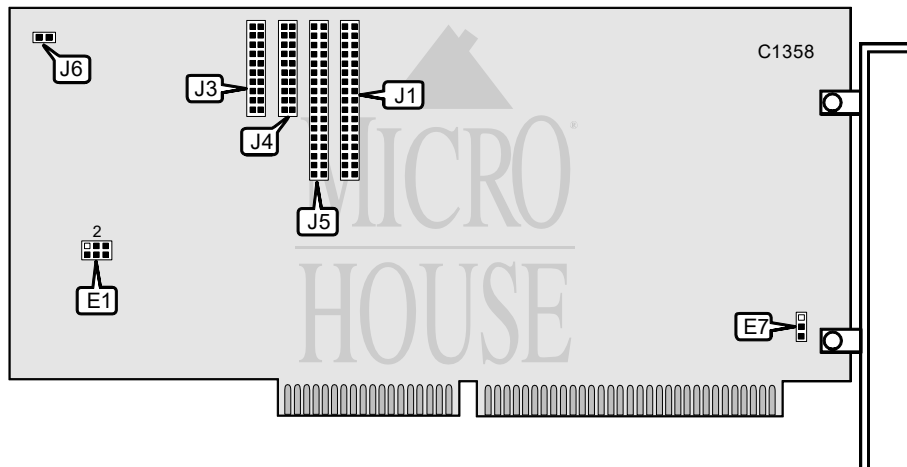

CONNECTIONS			
Function	Label	Function	Label
34-pin cable connector - floppy drive	J1	34-pin control cable connector - hard drive	J5
20-pin data cable connector - drive 2	J3	2-pin drive active LED	J6
20-pin data cable connector - drive 1	J4		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Hard drive interface supports all standard transfer rates	E7	Pins 1 & 2 closed
Hard drive interface does not support 300Kbps transfer rate	E7	Pins 2 & 3 closed

BASE I/O ADDRESS SELECTION	
Setting	E1
Primary	Pins 2 & 3, 5 & 6 closed
Secondary	Pins 1 & 2, 4 & 5 closed