


KOUWELL ELECTRONICS CORPORATION

KW-801

Data Bus
Card Size
Hard Drives supported
Floppy drives supported

32-bit PCI
Half-height, half-length card
Up to 7 SCSI-2 devices
None

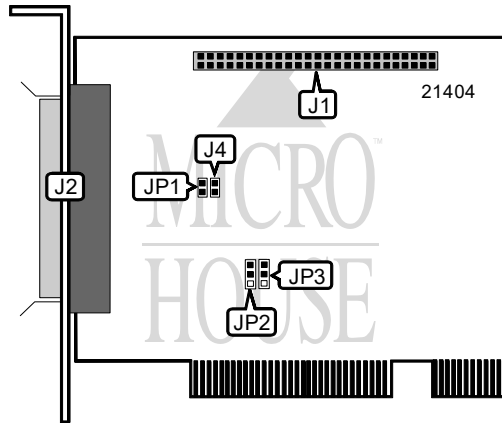

CONNECTIONS			
Function	Location	Function	Location
50-pin SCSI connector - internal	J1	2-pin connector - drive active LED	J4
50-pin SCSI connector - external	J2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Active termination enabled	JP1	Closed
Active termination disabled	JP1	Open
Note: When BOTH external AND internal devices exist, disable on-board termination jumper JP1 and insert the resistor array RP1-RP3. This setting is used if controller lies within the device chain. When only external devices OR only internal devices exist, enable JP1 and remove resistor array RP1-RP3. This setting is used when controller is at one end of device chain. (Location of resistors RP1-RP3 is unidentified.)		

PCI INTERRUPT SELECTION			
Setting	JP2	JP3	
INTA	Pins 2 & 3 closed	Open	
INTB	Pins 1 & 2 closed	Open	
INTC	Open	Pins 2 & 3 closed	
INTD	Open	Pins 1 & 2 closed	