

# ADAPTEC, INC.

## AVA-2825

Hard Drives supported

Floppy drives supported

Data Bus

Card Size


Two IDE (AT) drives

Up to 7 Fast SCSI-2 devices

Two 360KB, 720KB, 1.2MB, or 1.44MB drives

32-bit VESA Local Bus

Three-quarter length, full-height

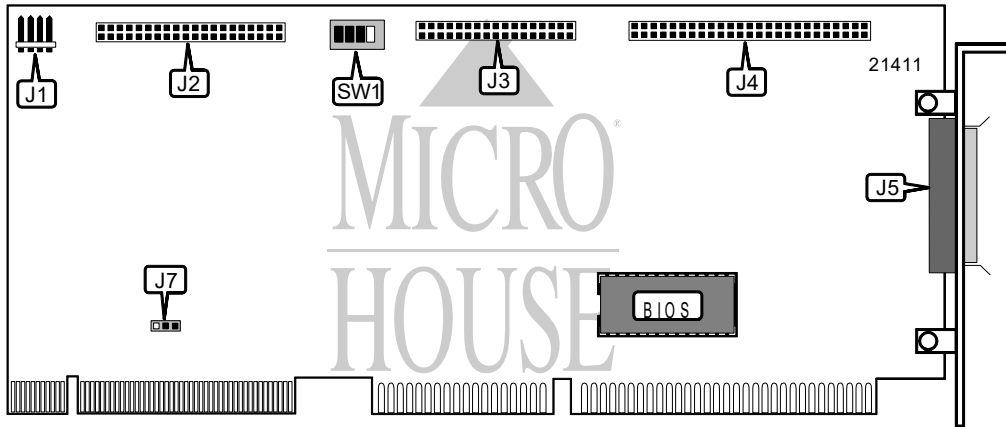

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	J1	50-pin SCSI connector - internal	J4
40-pin IDE(AT) connector	J2	50-pin SCSI connector - external	J5
34-pin cable connector - floppy drive	J3		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
SCSI I/O base address is 340h-35Fh	J7	Pins 1 & 2 closed	
SCSI I/O base address is 140h-15Fh	J7	Pins 2 & 3 closed	
Floppy drive interface enabled	SW1/1	On	
Floppy drive interface disabled	SW1/1	Off	
IDE(AT) interface enabled	SW1/2	Off	
IDE(AT) interface disabled	SW1/2	On	

BIOS ADDRESS SELECTION			
Address	SW1/3		SW1/4
C8000h	Off		Off
CC000h	Off		On
D8000h	On		Off
DC000h	On		On