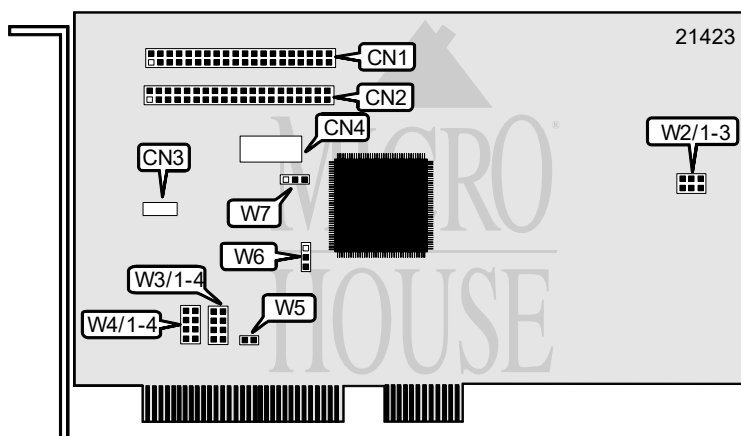# CMD TECHNOLOGY, INC.
CSA-6400E

Card Type   Hard drive controller
Hard Drives supported   Four IDE (AT) drives
Floppy drives supported   None
Data Bus   32-bit PCI
Card Size   Half length, full-height

CONNECTIONS			
Function	Location	Function	Location
40-pin secondary IDE(AT) connector	CN1	Drive active LED	CN3
40-pin primary IDE(AT) connector	CN2	Paddle board connector	CN4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í DskChg (removable media) disabled	W2/1	Open
DskChg (removable media) enabled	W2/1	Closed
í Base address enabled	W2/2	Closed
Base address disabled	W2/2	Open
í PCI chip enabled	W2/3	Open
PCI chip disabled	W2/3	Closed
í Factory configured - do not alter	W3/ 1 - 4	Open
í Factory configured - do not alter	W4/ 1 - 4	Open
í Factory configured - do not alter	W5	Open
í Normal base addressing (Legacy mode) enabled	W6/pins 2 & 3	Closed
í Normal base addressing (Legacy mode) enabled	W7/pins 2 & 3	Closed
Note: W6 & W7 pins 1 & 2 positions are not used.		