


NEC TECHNOLOGIES, INC.

T-130B (CD-XT003)

Card Type
Hard Drives supported
Floppy drives supported
Data Bus
Card Size

Hard drive controller
Up to 7 SCSI devices
None
8-bit ISA
Half-length, full-height

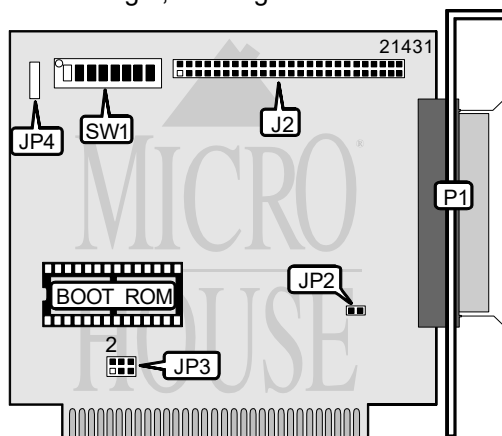

CONNECTIONS			
Function	Label	Function	Label
50-pin SCSI connector - internal	J2	25-pin SCSI connector - external	P1
Drive active LED	JP4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Zero wait state enabled	JP2	Closed
Zero wait state disabled	JP2	Open
í Boot ROM enabled	SW1/6	Off
Boot ROM disabled	SW1/6	On
í Factory configured - do not alter	SW1/7	Off
í Factory configured - do not alter	SW1/8	Off

BOOT ROM ADDRESS SELECTION			
Setting	SW1/3	SW1/4	SW1/5
CA000h	Off	Off	On
CE000h	Off	On	Off
DA000h	On	Off	Off
DE000h	On	Off	On
Note: If no EPROM chip installed in the boot ROM socket, the above switches should be in the "off" position.			

I/O ADDRESS SELECTION		
Setting	SW1/1	SW1/2
240h	On	On
250h	On	Off
340h	Off	On
í 350h	Off	Off

Continued on next page . . .

NEC TECHNOLOGIES, INC.
T-130B (CD-XT003)

. . . continued from previous page

INTERRUPT SELECTION			
Setting	JP3/pins 1 & 2	JP3/pins 3 & 4	JP3/pins 5 & 6
IRQ3	Closed	Open	Open
IRQ5	Open	Closed	Open
IRQ7	Open	Open	Closed
Disabled	Pins 2 & 4 closed		