


# GSI, INC. MODEL 1C

Card Type	Hard drive controller
Hard Drives supported	Two IDE (AT) drives
Floppy drives supported	None
Data Bus	16-bit ISA
Card Size	Half-length, full-height

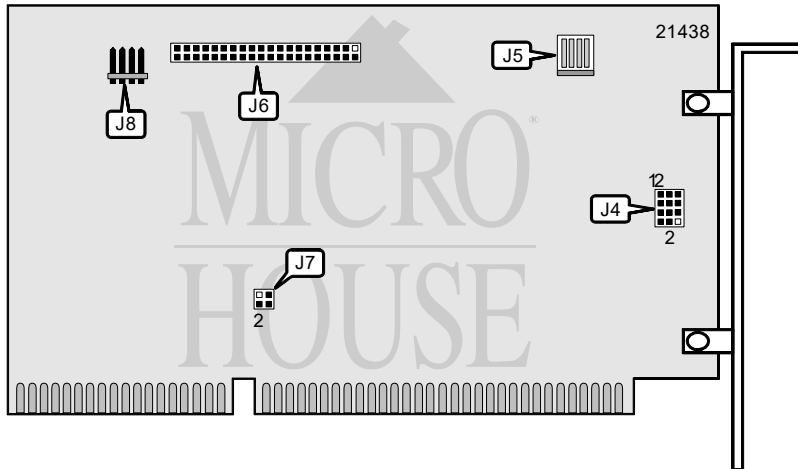

CONNECTIONS			
Function	Label	Function	Label
Auxiliary power connector	J5	4-pin connector - drive active LED	J8
40-pin IDE(AT) connector	J6		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í IDE(AT) interface enabled	J4	Pins 1 & 2 closed
IDE(AT) interface disabled	J4	Pins 2 & 3 closed
í IDE(AT) interface is secondary in system	J4	Pins 4 & 5 closed
IDE(AT) interface is primary in system	J4	Pins 5 & 6 closed
í IRQ 15 enabled	J7	Pins 1 & 2 closed
IRQ 12 enabled	J7	Pins 3 & 4 closed

BIOS ADDRESS SELECTION	
Address	J4
í C8000h	Pins 7 & 8, 10 & 11 closed
CC000h	Pins 7 & 8, 11 & 12 closed
D0000h	Pins 8 & 9, 10 & 11 closed
E0000h	Pins 8 & 9, 11 & 12 closed