


PROMISE TECHNOLOGY, INC.

DC5030D

Card Type
Hard Drives supported
Floppy drives supported
Data Bus
Card Size

Hard drive controller
Four IDE (AT) drives
None
32-bit PCI
Half-length, full-height

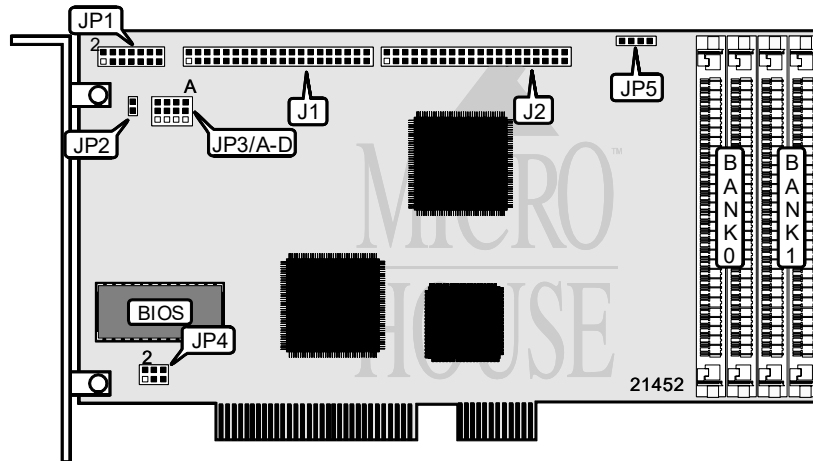

CONNECTIONS			
Function	Location	Function	Location
40-pin primary IDE(AT) connector	J1	Mini ISA IRQ support card connector	JP1
40-pin secondary IDE(AT) connector	J2	4-pin connector - drive active LED	JP5

JP1 CONNECTOR PIN-OUT			
Pin #	Function	Pin #	Function
1 - 3	Unidentified	5	IRQ15
4	IRQ14	6 - 14	Unidentified

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
PCI INT (A - D) enabled	JP2	Closed	
PCI INT (A - D) disabled	JP2	Open	
Relocatable I/O address disabled	JP3/A	Pins 1 & 2 closed	
Relocatable I/O address enabled	JP3/A	Pins 2 & 3 closed	
Primary IDE (AT) interface enabled	JP3/C	Pins 2 & 3 closed	
Secondary IDE (AT) interface enabled	JP3/C	Pins 1 & 2 closed	
Connection to ISA IRQ14 enabled	JP3/D	Pins 1 & 2 closed	
Connection to ISA IRQ15 enabled	JP3/D	Pins 2 & 3 closed	

CACHE MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
Unidentified	Unidentified	Unidentified

BIOS ADDRESS SELECTION	
Address	JP3/B
D8000h	Pins 1 & 2 closed
DC000h	Pins 2 & 3 closed

Continued on next page . . .

PROMISE TECHNOLOGY, INC.
DC5030D

. . . continued from previous page

PCI INTERRUPT SELECTION	
Setting	JP4
INTA	Pins 1 & 3 closed
INTB	Pins 3 & 5 closed
INTC	Pins 2 & 4 closed
INTD	Pins 4 & 6 closed
Note: You can only use one INT at a time.	