


ASUS COMPUTER INTERNATIONAL

PCI-DA2100

Card Type	Hard drive controller
Processor	486DX2
Maximum On Board Memory	32MB (EDO supported)
Hard Drives Supported	Up to 14 SCSI-2 Fast Wide devices
Floppy Drives Supported	None
Data Bus	32-bit PCI
Card Size	Half length, full height
Raid Levels Supported	0,1,3,5

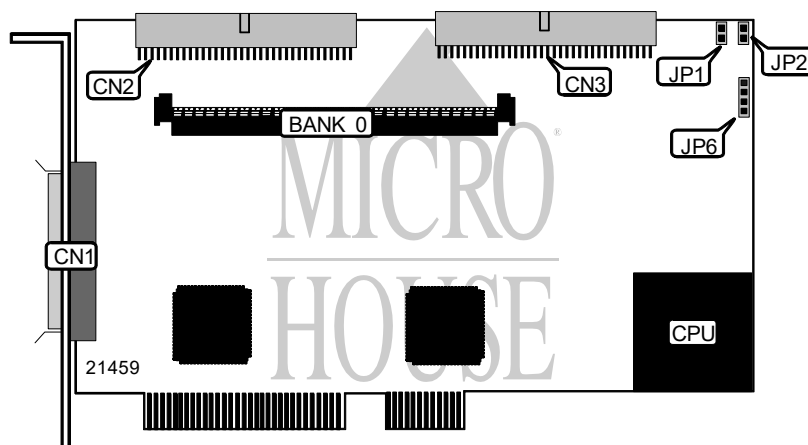

CONNECTIONS			
Function	Location	Function	Location
68-pin SCSI-2 Fast Wide connector channel 0 - external	CN1	68-pin SCSI-2 Fast Wide connector channel 1 - internal	CN3
68-pin SCSI-2 Fast Wide connector channel 0 - internal	CN2	4-pin connector - drive active LED	JP6

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Open
í Factory configured - do not alter	JP2	Open

DRAM CONFIGURATION	
Size	Bank 0
2MB	(1) 512K x 36
4MB	(1) 1M x 36
8MB	(1) 2M x 36
16MB	(1) 4M x 36
32MB	(1) 8M x 36
Note: DRAM with or without parity is accepted but with parity is recommended. EDO supported. Minimum of 2MB is required, but 4MB is suggested for RAID 3 and 5.	