


# KOUWELL ELECTRONIC CORPORATION

## KW-801V25A, KW-801V75

Card Type	Hard drive controller card
Maximum Onboard Memory	4KB (Internal)
Hard Drives supported	Up to 15 Fast & Wide devices (KW-801V25A) Up to 15 UltraSCSI Wide devices (KW-801V75)
Floppy drives supported	None
Data Bus	32-bit PCI
Card Size	Half-length, full-height card

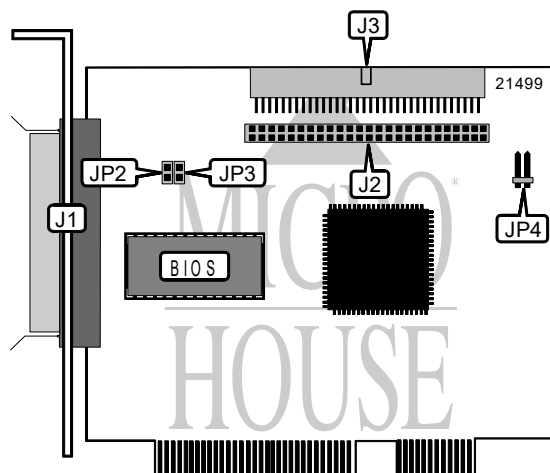

CONNECTIONS			
Function	Location	Function	Location
68-pin SCSI connector - external	J1	68-pin SCSI connector - internal	J3
50-pin SCSI connector - internal	J2	2-pin connector - drive active LED	JP4

TERMINATION CONFIGURATION			
Devices installed	Connectors Used	JP2	JP3
External Wide & Internal Narrow	J1 & J2	Open	Closed
External Wide & Internal Wide	J1 & J3	Open	Closed
Internal Narrow & Internal Wide	J2 & J3	Open	Open
External only	J1	Closed	Closed
Internal only	J2	Closed	Closed
Internal only	J3	Closed	Closed

MISCELLANEOUS TECHNICAL NOTES
Only two SCSI connectors (J1 & J2, J2 & J3 or J3 & J1) may be used at one time.