


DATA TECHNOLOGY CORPORATION

DTC-2277VL (400935-89A)

Card Type	Hard drive controller card
Maximum Onboard Memory	16MB DRAM
Hard Drives supported	Four IDE drives
Floppy drives supported	Two 360KB, 720KB, 1.2MB, or 1.44MB drives
Data Bus	32-bit VESA Local Bus
Card Size	Full-length, full-height card

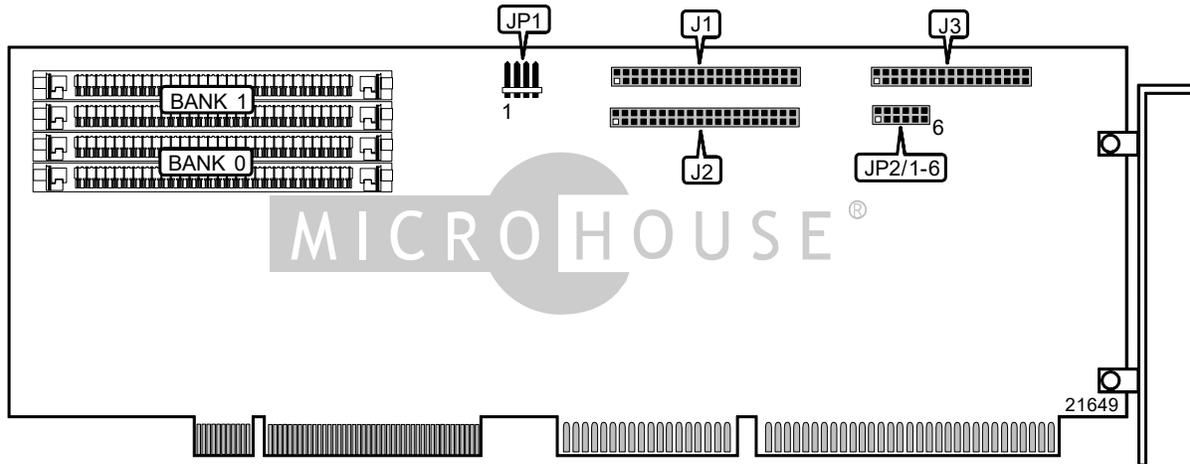

CONNECTIONS			
Function	Location	Function	Location
40-pin IDE(AT) connector	J1	34-pin cable connector - floppy drive	J3
40-pin IDE(AT) connector	J2	4-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	JP2/4-6	Unidentified	

BIOS ADDRESS SELECTION			
Address	JP2/1	JP2/2	JP2/3
C8000	Closed	Open	Open
CC000	Open	Closed	Open
D0000	Closed	Closed	Open
D4000	Open	Open	Closed
D8000	Closed	Open	Closed
í DC000	Closed	Closed	Closed
Disabled	Open	Open	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256KB x 9	None
1MB	(2) 256KB x 9	(2) 256KB x 9
2MB	(2) 1MB x 9	None
4MB	(2) 1MB x 9	(2) 1MB x 9
8MB	(2) 4MB x 9	None
10MB	(2) 4MB x 9	(2) 1MB x 9
16MB	(2) 4MB x 9	(2) 4MB x 9