


ADAPTEC, INC.
AHA-1520B

Card Type	Hard drive controller card
Hard Drives supported	Up to 7 SCSI devices
Floppy drives supported	None
Data Bus	16-bit ISA
Card Size	Three-quarter length, half-height card

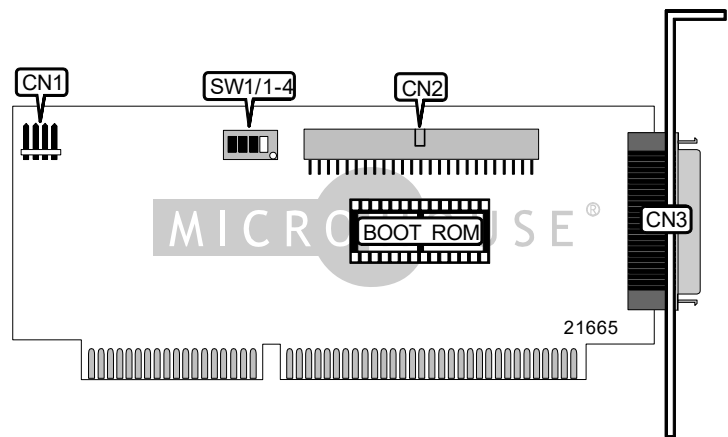

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	CN1	50-pin SCSI connector - external	CN3
50-pin SCSI connector - internal	CN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/4	Unidentified

BIOS ADDRESS SELECTION			
Address	SW1/1	SW1/2	SW1/3
DC000-DFFFFh	Off	Off	Off
D8000-DBFFFh	On	Off	Off
D4000-D7FFFh	Off	On	Off
D0000-D3FFFh	On	On	Off
CC000-CFFFFh	Off	Off	On
C8000-CBFFFh	On	Off	On
Inactive	Off	On	On
BIOS PROM disabled	On	On	On
Note: Do not use the inactive setting in Legacy/Non-Plug and Play systems. If you disable the BIOS PROM, you must run SCSISelect to synchronize the host adapter's resource table with your new selection. Synchronization is automatically performed just by entering SCSISelect.			