


RPTI INTERNATIONAL LTD.

ALL-IN-ONE ETHERNET CARD (E2013UC)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

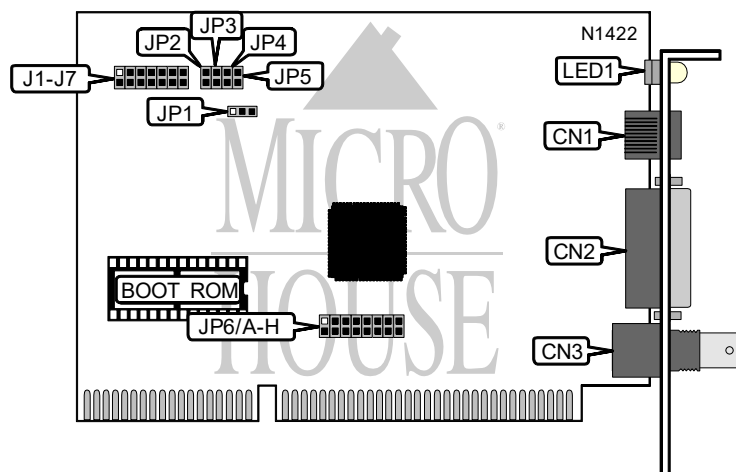

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN3
AUI transceiver via DB-15 port	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
IBM/PC compatible but not fully timing-compatible	JP1	Pins 2 & 3 closed	
IBM/PC compatible and fully timing-compatible	JP1	Pins 1 & 2 closed	

MODE SELECTION			
Setting	JP2	JP3	JP4
Jumper	Closed	Closed	Open
Jumperless	Open	Open	Closed

CABLE TYPE SELECTION	
Type	JP5
AUI transceiver via DB-15 port	Closed
RG-58A/U 50ohm coaxial	Open
Unshielded twisted pair	Open

Continued on next page. . .

RPTI INTERNATIONAL LTD.

ALL-IN-ONE ETHERNET CARD (E2013UC)

... continued from previous page

PCI INTERRUPT SELECTION								
IRQ	JP6/A	JP6/B	JP6/C	JP6/D	JP6/E	JP6/F	JP6/G	JP6/H
2/9	Closed	Open	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Closed

BOOT ROM ADDRESS SELECTION				
Address	J1	J2	J3	J4
Disabled	Open	Open	Open	N/A
C0000h	Open	Open	Closed	Open
C4000h	Open	Open	Closed	Closed
C8000h	Open	Closed	Open	Open
CC000h	Open	Closed	Open	Closed
D0000h	Open	Closed	Closed	Open
D4000h	Open	Closed	Closed	Closed
D8000h	Closed	Open	Open	Open
DC000h	Closed	Open	Open	Closed

BASE I/O ADDRESS SELECTION			
Setting	J5	J6	J7
240h	Open	Closed	Open
280h	Open	Closed	Closed
2C0h	Closed	Open	Open
300h	Open	Open	Open
320h	Closed	Open	Closed
340h	Closed	Closed	Open
360h	Closed	Closed	Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T network connection is good
LED1	Off	10Base-T network connection is broken