


# MYLEX BT-545C

Card Type  
Hard Drives supported  
Floppy drives supported  
Data Bus  
Card Size

Hard drive controller card  
Up to 7 SCSI devices  
Two 360KB, 720KB, 1.2MB, 1.44MB drives  
32-bit EISA  
Half-length, full-height card

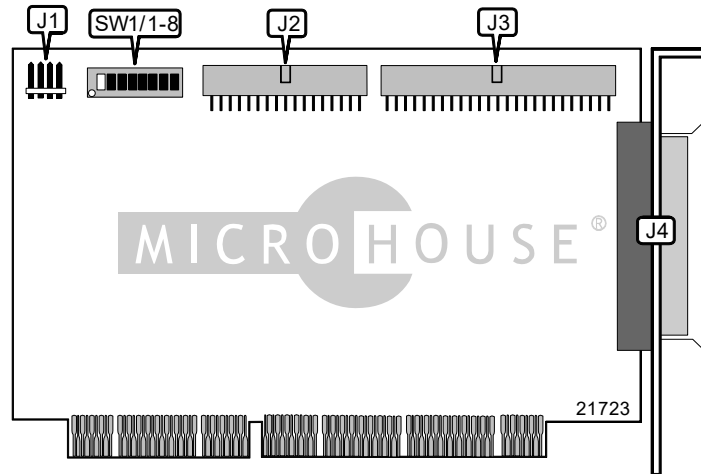

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	J1	50-pin SCSI connector - internal	J3
34-pin floppy drive connector	J2	50-pin SCSI connector - external	J4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/4	N/A
í Floppy drive enabled	SW1/8	On
Floppy drive disabled	SW1/8	Off

PORT ADDRESS SELECTION			
Address	SW1/1	SW1/2	SW1/3
130h	On	On	Off
134h	Off	On	Off
230h	On	Off	On
234h	Off	Off	On
í 330h	On	On	On
334h	Off	On	On
N/A	N/A	Off	Off

Continued on next page . . .

MYLEX  
BT-545C

. . . continued from previous page

BIOS ADDRESS SELECTION			
Address	SW1/5	SW1/6	SW1/7
C8000h	Off	On	Off
CC000h	On	On	Off
D0000h	Off	Off	On
D4000h	On	Off	On
D8000h	Off	On	On
í DC000h	On	On	On
Disabled	N/A	Off	Off